

# Hall Effect Angular Position Sensor

## 1. Features

- AEC-Q100 Grade0 qualified
- ISO26262 ASIL-B qualified
- Based on IMC 3D sensing principle, supporting angle and linear displacement detection in selectable XY, XZ, or YZ planes, as well as 3D position detection in XYZ space.
- Wide operating temperature range: -40°C to 160°C.
- Selectable output interfaces: Analog voltage, PWM (Pulse-Width Modulation), digital SPI, SAE J2716-compliant SENT, and 2-wire current-mode PSI5 (V2.3).
- Programmable linear transfer characteristic, configurable via arbitrary 4/8 points or 16/32-segment piecewise linear curves.
- 32-bit programmable user ID for device identification and traceability.
- Comprehensive on-chip diagnostic functions.
- Wire break diagnosis (VDD open, VSS open).
- Over-current and over-voltage protection; under-voltage detection.
- Package options: Single-channel SOP-8, dual-channel redundant TSSOP-16, and SIP-3. All packages are lead-free and compliant with EU RoHS requirements.



Fig.1 Encapsulation Schematic Diagram

## 2. Applications

- Accelerator Pedal Sensor
- Steering Wheel Angle Sensor
- Gear Shifter Position Detection
- Throttle Valve and EGR Valve

- Turbocharger Actuator
- Rotary Switch / Knob Switch
- Vehicle Body Height / Ride Height
- 3D Joystick

## 3. Description

The SC69431 is a new generation of position sensor chip based on the principle of IMC 3D magnetic induction. The chip integrates two pairs of perpendicularly placed Hall chip arrays and a magnetic collector. The signal is amplified by a preamplifier and sampled by the internal analog-to-digital converter circuitry, and the chip's proprietary DSP circuitry performs the angular algorithms, and finally outputs absolute angular, linear, and 3D positions through a variety of interface formats.

The SC69431 provides a variety of output methods: analog output, pulse width modulated PWM output, 4-wire digital SPI bus mode, digital SENT output, 2-wire current type PSI5 output. The output curve can be selected from any 4-point, 8-point, or range-selectable 16-segment, 32-segment, and other sub-curve programming methods.

The SC69431, a sensor chip primarily for automotive applications, provides a rich set of on-chip diagnostic functions. The chip was designed and developed following the ISO 26262 standard and is ASIL-B rated.

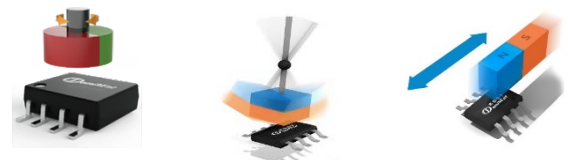


Fig.2 Product schematic diagram

CONTENTS

|                                          |          |                                               |           |
|------------------------------------------|----------|-----------------------------------------------|-----------|
| <b>1. Features.....</b>                  | <b>1</b> | <b>8. Dual-chip Isolation Parameters.....</b> | <b>7</b>  |
| <b>2. Applications.....</b>              | <b>1</b> | <b>9. Operating Characteristics.....</b>      | <b>8</b>  |
| <b>3. Description .....</b>              | <b>1</b> | <b>10. Block Diagram .....</b>                | <b>14</b> |
| <b>4. Terminal Configuration .....</b>   | <b>3</b> | <b>11. Function Description .....</b>         | <b>15</b> |
| <b>5. Ordering Information.....</b>      | <b>6</b> | <b>12. Typical Application Circuit .....</b>  | <b>42</b> |
| <b>6. Absolute Maximum Ratings .....</b> | <b>7</b> | <b>13. Packaging Information .....</b>        | <b>48</b> |
| <b>7. ESD Protection .....</b>           | <b>7</b> | <b>14. Revision History.....</b>              | <b>51</b> |

## 4. Terminal Configuration

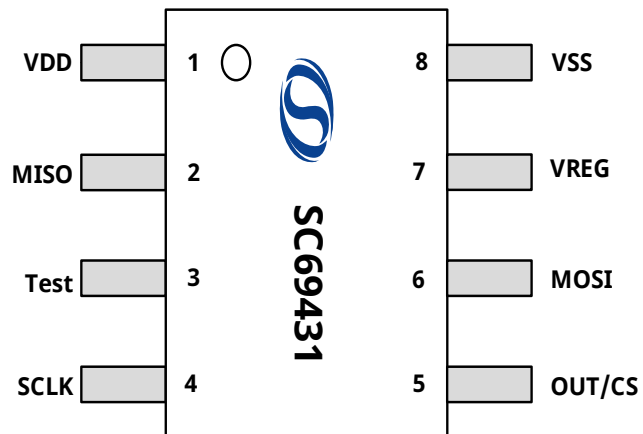


Fig.3 SOP-8 Pin Description

| Name   | Terminal | Type                  | Description                                                  |
|--------|----------|-----------------------|--------------------------------------------------------------|
| VDD    | 1        | Power supply          | Power input                                                  |
| MISO   | 2        | Test/Digital Output   | Test pin, ground; MISO: Master in Slave out data pin for SPI |
| Test   | 3        | Test                  | Test Pins, Ground; Ground; Test Pins, Ground                 |
| SCLK   | 4        | Test/Digital Input    | Test pin, ground; SCLK: SPI clock signal input.              |
| OUT/CS | 5        | Outputs/Digital Input | Analog output; PWM; SENT; CS: SPI enable input pin           |
| MOSI   | 6        | Test/Digital Input    | Test pin, ground; MOSI: Master-out slave-in data pin for SPI |
| VREG   | 7        | Power output          | Internal power supply                                        |
| VSS    | 8        | Ground                | Ground                                                       |

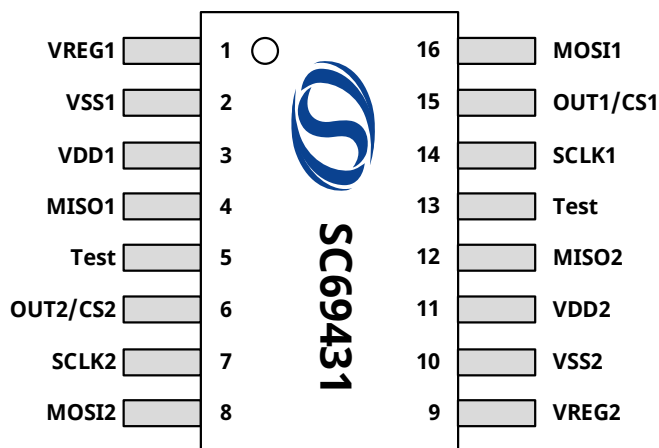


Fig.4 TSSOP-16 Pin Description

| Name     | Terminal | Type                  | Description                                                                      |
|----------|----------|-----------------------|----------------------------------------------------------------------------------|
| VREG1    | 1        | Power output          | Chip 1 - Internal power supply                                                   |
| VSS1     | 2        | Ground                | Chip 1 - Ground                                                                  |
| VDD1     | 3        | Power supply          | Chip 1 - Power Input                                                             |
| MISO1    | 4        | Digital Input         | Chip 1 - MISO: Master-out Slave-in Data Pin for SPI                              |
| Test     | 5        | Test                  | Chip 2 - test pin, connect to ground                                             |
| OUT2/CS2 | 6        | Outputs/Digital Input | Chip 2 - Analog output; PWM; SENT; CS:SPI enable input pin                       |
| SCLK2    | 7        | Test/Digital Input    | Chip 2 - test pin, connect to ground; SCLK: SPI clock signal input.              |
| MOSI2    | 8        | Digital Input         | Chip 2 - MOSI: Master-out Slave-in Data Pin for SPI                              |
| VREG2    | 9        | Power output          | Chip 2 - Internal power supply                                                   |
| VSS2     | 10       | Ground                | Chip 2 - Ground                                                                  |
| VDD2     | 11       | Power supply          | Chip 2 - Power Input                                                             |
| MISO2    | 12       | Test/Digital Output   | Chip 2 - test pin, connect to ground; MISO: master-in-slave-out data pin for SPI |
| Test     | 13       | Test                  | Chip 1 - test pin, connect to ground                                             |
| SCLK1    | 14       | Test/Digital Input    | Chip 1 - test pin, connect to ground; SCLK: SPI clock signal input.              |
| OUT1/CS1 | 15       | Outputs/Digital Input | Chip 1 - Analog output; PWM; SENT; CS: SPI enable input pin                      |
| MOSI1    | 16       | Digital Input         | Chip 1 - MOSI: Master-out Slave-in Data Pin for SPI                              |

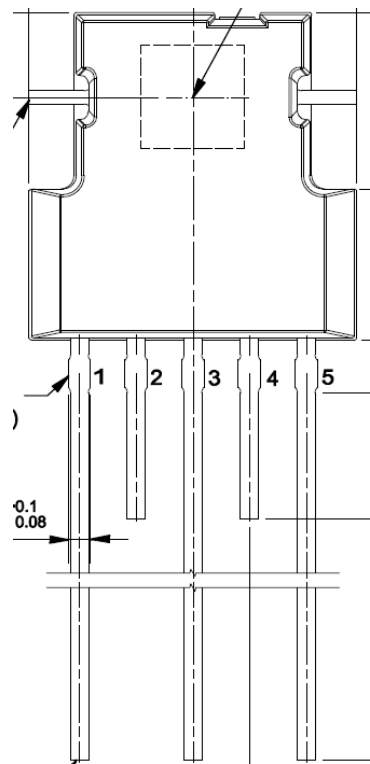



Fig.5 SIP-3 Pin Description

| Name  | Terminal | Type         | Description              |
|-------|----------|--------------|--------------------------|
| VDD   | 1        | Power supply | Power input/PSI5-OUT     |
| VSS   | 3        | Ground       | Ground                   |
| OUT 1 | 5        | Power output | Analog output; PWM; SENT |

## 5. Ordering Information

| Ordering Information | Ambient (°C) | Package     | Pack      | Quantity         |
|----------------------|--------------|-------------|-----------|------------------|
| SC69431DC-000-TR-Q   | -40~160      | SOP-8       | Tape&Reel | 4000 pieces/reel |
| SC69431DC-PSI-TR-Q   | -40~160      | SOP-8       | Tape&Reel | 4000 pieces/reel |
| SC69431DC-SPI-TR-Q   | -40~160      | SOP-8       | Tape&Reel | 4000 pieces/reel |
| SC69431TG-000-TR-Q   | -40~160      | TSSOP-16    | Tape&Reel | 3000 pieces/reel |
| SC69431TG-SPI-TR-Q   | -40~160      | TSSOP-16    | Tape&Reel | 3000 pieces/reel |
| SC69431S3-000-TR-Q   | -40~160      | single SIP3 | Tape&Reel | 3000 pieces/reel |
| SC69431S3-001-TR-Q   | -40~160      | single SIP3 | Tape&Reel | 3000 pieces/reel |
| SC69431S3-PSI-TR-Q   | -40~160      | single SIP3 | Tape&Reel | 3000 pieces/reel |

### Ordering Information Format

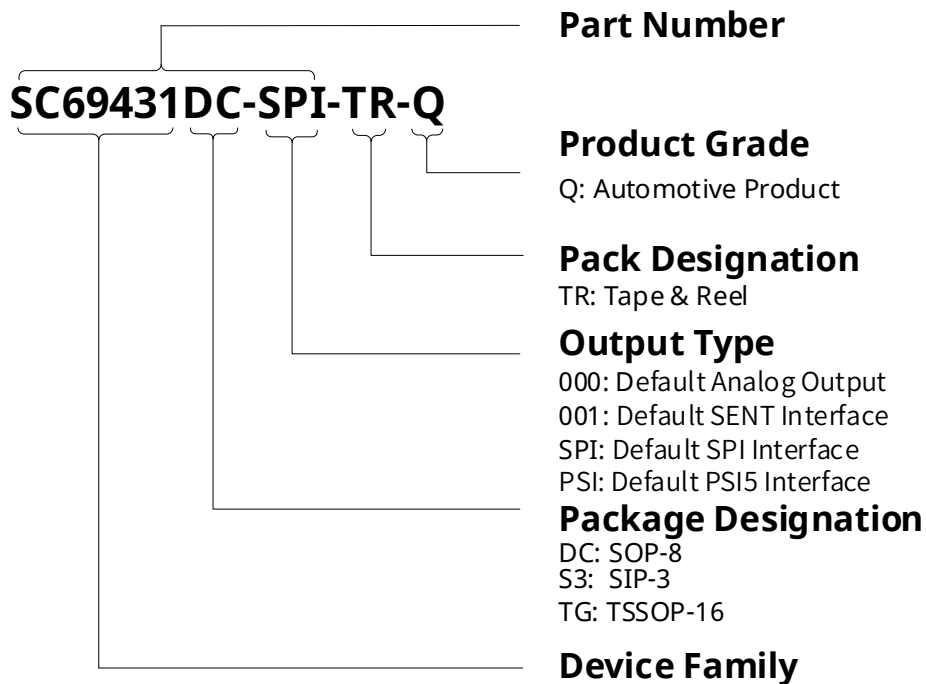

## 6. Absolute Maximum Ratings

Within the natural temperature range of operation (unless otherwise specified) <sup>(1)</sup>

| Symbol              | Parameter               | Test Conditions | Min. | Max. | Units |
|---------------------|-------------------------|-----------------|------|------|-------|
| V <sub>DD</sub>     | Supply Voltage          | t<48h           | -14  | 28   | V     |
| V <sub>DD</sub>     |                         | t<60s           | -18  | 37   | V     |
| V <sub>OUT</sub>    | Output voltage          | t<48h           | -10  | 24   | V     |
| V <sub>OUT</sub>    |                         | t<60s           | -10  | 30   | V     |
| V <sub>SPIOUT</sub> | SPI Output Voltage      |                 | -0.3 | 8    | V     |
| I <sub>R</sub>      | Reverse Output Current  |                 | -40  | 160  | mA    |
| T <sub>A</sub>      | Operating Temperature   |                 | -40  | 160  | °C    |
| T <sub>S</sub>      | Storage Temperature     |                 | -40  | 160  | °C    |
| H                   | Magnetic Field Strength |                 | -1   | 1    | T     |

Note:

(1) Stresses above those listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## 7. ESD Protection

| Symbol           | Parameter | Test Conditions                        | Min.              | Max.             | Units |
|------------------|-----------|----------------------------------------|-------------------|------------------|-------|
| V <sub>ESD</sub> | HBM       | according to standard AEC-Q100-002 HBM | -6 <sup>(1)</sup> | 6 <sup>(1)</sup> | kV    |

Note:

(1) Target value

## 8. Dual-chip Isolation Parameters

| Symbol | Parameter          | Test Conditions | Min. | Max. | Units |
|--------|--------------------|-----------------|------|------|-------|
| IsoR   | Isolation resistor |                 | 4    |      | MΩ    |

## 9. Operating Characteristics

### Electrical Characteristics

(Operating conditions:  $T_{AMB} = -40 \sim 160^{\circ}\text{C}$ ,  $V_{DD} = 4.5 \sim 5.5\text{V}$ , unless otherwise specified)

| Symbol              | Parameters                            | Test Conditions                                                                   | Min. | Typ. | Max. | Units      |
|---------------------|---------------------------------------|-----------------------------------------------------------------------------------|------|------|------|------------|
| $V_{DD}$            | Supply voltage                        | 5V mode                                                                           | 4.5  | 5.0  | 5.5  | V          |
| $V_{DD\_3.3V}$      |                                       | $V_{REG}$ and $V_{DD}$ are connected to 3.3V at the same time, $U_{VLO\_3P3EN}=1$ | 3.15 | 3.3  | 3.6  | V          |
| $V_{DD}$            |                                       | PSI5                                                                              | 4.1  |      | 12   | V          |
| $I_{DD}$            | Supply current                        | Single path SOP-8                                                                 | -    | 7.5  | 10   | mA         |
| $I_{surge}$         | Isurge current                        | Single path SOP-8                                                                 | -    | -    | 25   | mA         |
| $I_{OCP}$           | Overcurrent alarm                     | Single path SOP-8                                                                 | -    | 25   | 35   | mA         |
| $I_{ERRSTART}$      | Starting current error                | PSI5                                                                              | -2   | -    | 2    | mA         |
| $\Delta I_S$        | Sink current                          | PSI5-Normal power mode                                                            | 22   | 26   | 30   | mA         |
|                     |                                       | PSI5-Low power mode                                                               | 11   | 13   | 15   | mA         |
| $I_{SDRIFT}$        | Static current offset                 | PSI5                                                                              | -4   |      | 4    | mA         |
| $V_{REG}$           | Regulated voltage                     | 5V mode                                                                           | 3.13 | 3.3  | 3.47 | V          |
| $V_{REGOV}$         | Regulated voltage overdrive detection |                                                                                   | 3.5  | 3.7  | 3.89 | V          |
| $V_{REGUVL}$        | Regulated voltage low detection       |                                                                                   | 2.8  | 2.9  | 3.0  | V          |
| $V_{DD\_startH}$    | Starting voltage                      | 5V mode                                                                           | 3.8  |      |      | V          |
| $V_{DD\_startHyst}$ | Starting voltage hysteresis           | 5V mode                                                                           |      | 100  |      | mV         |
| $V_{UVLO}$          | Undervoltage detection voltage        | $U_{VLO\_3P3}=0$                                                                  | 3.8  | 3.9  | 4.1  | V          |
|                     |                                       | $U_{VLO\_3P3}=1$                                                                  | 2.6  | 2.8  | 3.0  | V          |
| $V_{UVLOHYS}$       | Undervoltage detection hysteresis     |                                                                                   | 50   | 100  | 200  | mV         |
| $V_{OVP}$           | Overvoltage protection voltage        |                                                                                   | 6.0  | 6.2  | 6.5  | V          |
|                     |                                       | PSI5                                                                              | 22   | 24   | 26   | V          |
| $V_{OVPHYST}$       | Overvoltage detection hysteresis      |                                                                                   | 50   |      | 200  | mV         |
|                     |                                       | PSI5                                                                              | 0.8  | 1.4  | 2.0  | V          |
| $I_{short}$         | Output short-circuit current          | Shorted to ground, analog output                                                  | -    | -    | 15   | mA         |
|                     |                                       | Shorted to ground, PWM, SENT push-pull outputs                                    | -    | -    | 30   | mA         |
|                     |                                       | Shorted to power, analog output                                                   | -    | -    | 15   | mA         |
|                     |                                       | Short-Circuit to power, PWM, SENT push-pull outputs                               | -    | -    | 30   | mA         |
| $R_L$               | Analog output load resistance         | Pull-up resistor, connected to power supply                                       | 4.7  | 10   |      | k $\Omega$ |
|                     |                                       | Pull-down resistor, connected to ground                                           | 4.7  | 10   |      | k $\Omega$ |



## Electrical Characteristics (Continued)

|                     |                                              |                                                              |      |      |     |                  |
|---------------------|----------------------------------------------|--------------------------------------------------------------|------|------|-----|------------------|
| R <sub>L_PWM</sub>  | PWM output load resistance                   | Pull-up resistor, connected to power supply                  | 1    |      |     | kΩ               |
|                     |                                              | Pull-down resistor, connected to ground                      | 1    |      |     | kΩ               |
| Vsat_lo             | Analog output saturation level               | Pull-up resistor R≥10k, connected to power supply            |      | 0.5  | 2   | %V <sub>DD</sub> |
|                     |                                              | Pull-up resistor R≥4.7k, connected to power supply           |      | 2.5  | 3   | %V <sub>DD</sub> |
| Vsat_hi             |                                              | Pull-down resistor R≥4.7k, connected to ground               | 95   | 98   |     | %V <sub>DD</sub> |
|                     |                                              | Pull-down resistor R≥10k, connected to ground                | 97   | 99   |     | %V <sub>DD</sub> |
| VsatD_lo            | Digital output level                         | Pull-up resistor R≥10k, connected to the power supply        |      | 0.5  | 1   | %V <sub>DD</sub> |
|                     |                                              | Pull-up resistor R≥1k, connected to the power supply         |      | 2.5  | 4   | %V <sub>DD</sub> |
| VsatD_hi            |                                              | Pull-down resistor R≥1k, connected to ground                 | 85   | 90   |     | %V <sub>DD</sub> |
|                     |                                              | Pull-down resistor R≥10k, connected to ground                | 97.5 | 98   |     | %V <sub>DD</sub> |
| Dsat_lo             | Active diagnostic output level               | Pull-up resistor R≥10k                                       |      | 0.5  | 1   | %V <sub>DD</sub> |
|                     |                                              | Pull-up resistor R≥4.7k                                      |      | 1    | 2   | %V <sub>DD</sub> |
| Dsat_hi             |                                              | Pull-down resistor R≥10k                                     | 97.5 | 98.5 |     | %V <sub>DD</sub> |
|                     |                                              | Pull-down resistor R≥4.7k                                    | 95   | 97   |     | %V <sub>DD</sub> |
| BV <sub>SS</sub> PD | Passive diagnostic output level (Open drain) | V <sub>SS</sub> Open, pull-down resistor, R≤10k              |      | 0.5  | 1.6 | %V <sub>DD</sub> |
| BV <sub>SS</sub> PU |                                              | V <sub>SS</sub> Open, pull-up resistor, R≥1k, pull-up to 5V  | 99.5 | 100  |     | %V <sub>DD</sub> |
| BV <sub>DD</sub> PD |                                              | V <sub>DD</sub> Open, pull-down resistor, R≥1k               |      | 0    | 0.5 | %V <sub>DD</sub> |
| BV <sub>DD</sub> PU |                                              | V <sub>DD</sub> Open, pull-up resistor, R≤10k, pull-up to 5V | 97   | 99.5 |     | %V <sub>DD</sub> |
| Clamp_lo            | Programmable clamp voltage                   | Programmable                                                 | 0    |      | 100 | %V <sub>DD</sub> |
| Clamp_hi            |                                              | Programmable                                                 | 0    |      | 100 | %V <sub>DD</sub> |

Note:

(1)Based on the description in the table above, the SC69431 can meet the output range settings for the typical application of Fig.6

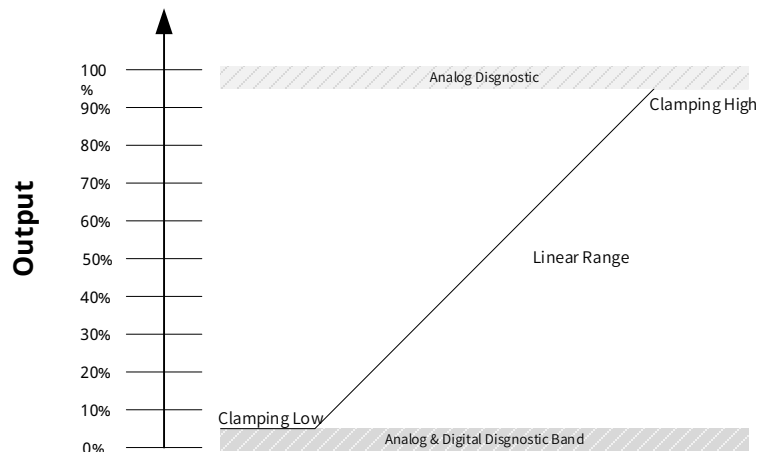


Fig.6 Example of Output Range for Typical Application

### Timing parameters - basic timing

| Symbol            | Parameters                              | Test Conditions       | Min. | Typ. | Max. | Units   |
|-------------------|-----------------------------------------|-----------------------|------|------|------|---------|
| $F_{CK}$          | Master Clock Frequency                  | Full Temperature Test | 7.8  | 8.2  | 8.5  | MHz     |
| $\Delta F_{CK,T}$ | Main Clock Frequency Temperature Offset |                       | -3   | -    | 3    | %FCK    |
| $T_{per}$         | Data Refresh Frequency                  |                       | -    | 200  | 250  | $\mu s$ |
| $T_s$             | Step Response Time                      |                       | -    | 400  | 500  | $\mu s$ |
| $T_{POR}$         | Power-On Reset                          |                       | -    | 40   | -    | $\mu s$ |
| $T_{INIT}$        | Initialization Time                     |                       | -    | 3    | 5    | ms      |

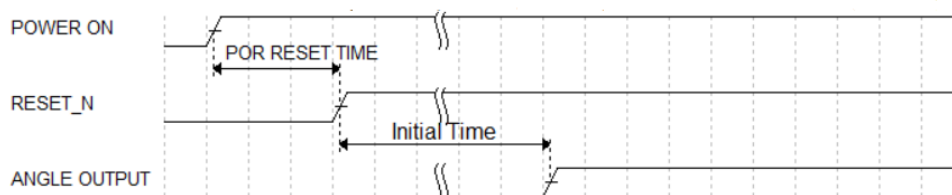


Fig.7 Power-on reset timing sequence

### Timing parameters - EEPROM Timing

| Symbol   | Parameters          | Test Conditions | Min. | Typ. | Max. | Units   |
|----------|---------------------|-----------------|------|------|------|---------|
| $t_{ps}$ | Power-on Reset Time |                 |      | 100  |      | $\mu s$ |
| $t_{pw}$ |                     |                 |      | 100  |      | $\mu s$ |
| TIDLE    | Standby Time        |                 |      | 20   |      | ms      |

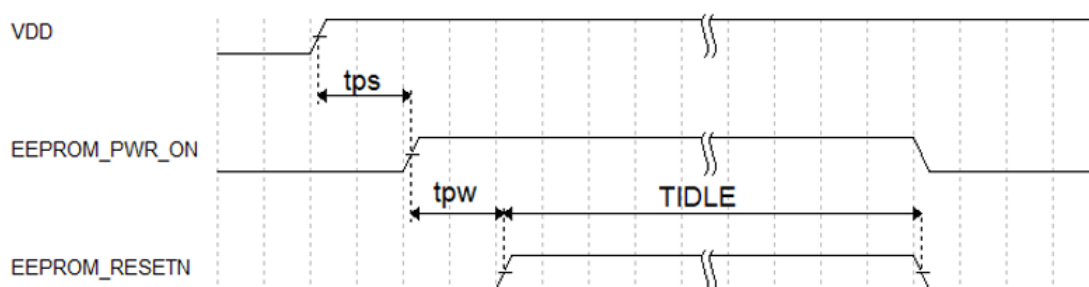


Fig.8 EEPROM Timing

## Timing parameters - PWM Output

| Symbol           | Parameters                               | Test Conditions                 | Min. | Typ.(1) | Max. | Units     |
|------------------|------------------------------------------|---------------------------------|------|---------|------|-----------|
| $F_{PWM}$        | PWM Frequency                            | Frequency range                 | 100  |         | 2000 | Hz        |
| $F_{PWM\_Init}$  | PWM Frequency Initial Tolerances         | 25°C                            |      |         | ±2%  | $F_{PWM}$ |
| $F_{PWM\_EOL}$   | Tolerances                               | 25°C                            |      |         | ±1%  | $F_{PWM}$ |
| $\Delta F_{PWM}$ | PWM Frequency Temperature Drift          | PWM frequency temperature drift |      |         | ±3%  | $F_{PWM}$ |
| $T_{rise\_LSD}$  | PWM Output Rise Time(Open-Drain Output)  | 4.7nF, $R_L=1k\Omega$ pull-up   |      | 10      |      | $\mu s$   |
|                  |                                          | 10nF, $R_L=1k\Omega$ pull-up    |      | 20      |      | $\mu s$   |
| $T_{rise\_PP}$   | PWM Output Rise Time (Push-Pull Output)  | 4.7nF, $R_L=1k\Omega$ pull-up   |      | 3       |      | $\mu s$   |
|                  |                                          | 10nF, $R_L=1k\Omega$ pull-up    |      | 4       |      | $\mu s$   |
| $T_{fall\_LSD}$  | PWM Output Fall Time (Open-Drain Output) | 4.7nF, $R_L=1k\Omega$ pull-up   |      | 2       |      | $\mu s$   |
|                  |                                          | 10nF, $R_L=1k\Omega$ pull-up    |      | 4       |      | $\mu s$   |
| $T_{fall\_PP}$   | PWM Output Fall Time (Push-Pull Output)  | 4.7nF, $R_L=1k\Omega$ pull-up   |      | 2       |      | $\mu s$   |
|                  |                                          | 10nF, $R_L=1k\Omega$ pull-up    |      | 4       |      | $\mu s$   |

## Timing parameters - SPI Output

| Symbol          | Parameters                                     | Test Conditions | Min.               | Typ. | Max.               | Units |
|-----------------|------------------------------------------------|-----------------|--------------------|------|--------------------|-------|
| $V_{IH}$        | High Level Input Voltage                       |                 | $0.6 \cdot V_{DD}$ | -    | $V_{DD}$           | V     |
| $V_{IL}$        | Low Level Input Voltage                        |                 | 0                  | -    | $0.4 \cdot V_{DD}$ | V     |
| $V_{IH}$        | High Level Output Voltage                      |                 | $V_{DD}-0.4$       | -    | $V_{DD}$           | V     |
| $V_{IL}$        | Low Level Output Voltage                       |                 | 0                  |      | $V_{SS}+0.4$       | V     |
| $t_{CLK}$       | Clock Cycle                                    |                 | 450                | 500  | -                  | ns    |
| $t_{CLK\_LO}$   | Clock low level                                |                 | 225                | -    | -                  | ns    |
| $t_{CLK\_HI}$   | Clock high level                               |                 | 225                | -    | -                  | ns    |
| $t_{MISO}$      | Output data delay time                         |                 | -                  | -    | 210                | ns    |
| $t_{MOSI}$      | Data capture setup time                        |                 | -                  | 30   | -                  | ns    |
| $t_1$           | Initial clock delay time                       |                 | 225                | -    | -                  | ns    |
| $t_2$           | Initial output data establishment time         |                 | -                  | 90   | 120                | ns    |
| $t_3$           | Communication completion enable keep time      |                 | 225                | -    | -                  | ns    |
| $t_4$           | Communication completion output retention time |                 | -                  | 90   | 120                | ns    |
| $t_{SyncPulse}$ | Synchronized Pulse Period                      |                 | 520                | -    | 1000               | ns    |

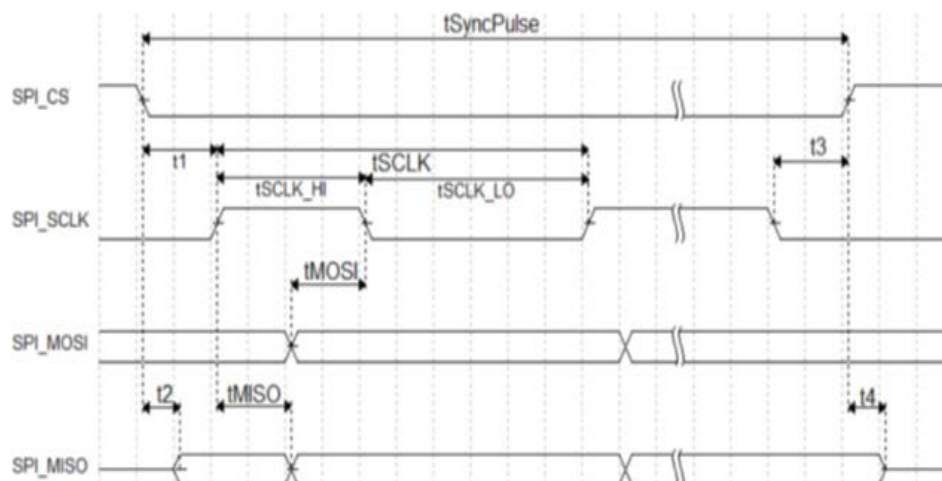


Fig.9 SPI Timing

### Timing parameters – SENT Output

| Symbol               | Parameters                        | Test Conditions                    | Min. | Typ. | Max. | Units |
|----------------------|-----------------------------------|------------------------------------|------|------|------|-------|
| TICK <sub>time</sub> | Tick Time                         |                                    | 1.5  | -    | 6    | us    |
| N <sub>nibble</sub>  | Number of data Nibble             |                                    | 3    | 6    | -    | -     |
| T <sub>rise</sub>    | SENT edge rise time               | Between 1.1V and 3.8V              | -    | 12.5 | 18   | us    |
| T <sub>fall</sub>    | SENT edge fall time               | Between 1.1V and 3.8V              | -    | 5.3  | 6.5  | us    |
| N <sub>pp</sub>      | SENT frame cycle (no pause bit)   |                                    | 154  | -    | 270  | ticks |
| P <sub>pc</sub>      | SENT frame cycle (with pause bit) |                                    | 282  | -    | 922  | ticks |
| A.1                  | Sensor type                       | Dual Body Position Sensor          | -    | -    | -    | -     |
| A.3                  |                                   | Single Reliable Sensor             | -    | -    | -    | -     |
| T <sub>FRAME</sub>   | SENT frame cycle (slow)           | Standard data sequence (40 frames) | -    | 691  | -    | ms    |
|                      |                                   | Extended Data Sequence (24 frames) | -    | 415  | -    | ms    |

### Timing parameters – PSI5 Output

| Symbol             | Parameters                      | Test Conditions                                                  | Min. | Typ. | Max. | Units |
|--------------------|---------------------------------|------------------------------------------------------------------|------|------|------|-------|
| T <sub>cycle</sub> | Communication cycle             |                                                                  |      | 300  |      | us    |
|                    |                                 |                                                                  |      | 500  |      | us    |
|                    |                                 |                                                                  |      | 1000 |      | us    |
| T <sub>bit</sub>   | bit time                        | 125 kbit/s                                                       | 7.6  | 8    | 8.4  | us    |
|                    |                                 | 189 kbit/s                                                       | 5    | 5.3  | 6    | us    |
| T <sub>SHOLD</sub> | Synchronization pulse hold time |                                                                  | 9    |      |      | us    |
| T <sub>RISE</sub>  | Current slope rise time         |                                                                  | 0.33 |      | 1    | us    |
| TFALL              | Current slope fall time         |                                                                  | 0.33 |      | 1    | us    |
| MSR                | Mark/Space Ratio                | (tfall, 80 - trise, 20) / TBit<br>(tfall, 20 - trise, 80) / TBit | 47   | 50   | 53   | %     |

## Accuracy Parameters - Analog Output

| Symbol              | Parameters                          | Test Conditions               | Min.  | Typ. | Max. | Units |
|---------------------|-------------------------------------|-------------------------------|-------|------|------|-------|
| R <sub>ADC</sub>    | ADC Resolution                      |                               | -     | 15   | -    | bits  |
| R <sub>DAC</sub>    | Analog Output Resolution            |                               | -     | 12   | -    | bits  |
| INL                 | DAC Integral Nonlinearity Error     |                               | -4    | -    | 4    | LSB   |
| DNL                 | DAC Differential Nonlinearity Error |                               | 0.05  | -    | 3    | LSB   |
| $\Delta E_{L_{XY}}$ | XY Inherent Linearity Error         |                               | -1    | -    | 1    | Deg   |
| $\Delta E_{L_{XZ}}$ | XZ Inherent Linearity Error         |                               | -2.5  | -    | 2.5  | Deg   |
| $\Delta E_{L_{YZ}}$ | YZ Inherent Linearity Error         |                               | -2.5  | -    | 2.5  | Deg   |
| $\Delta E_{temp}$   | Angular Temperature Drift Error     | XY                            | -0.5  | -    | 0.5  | Deg   |
| $\Delta E_{ratio}$  | Proportional Output Error           | 4.5V ≤ V <sub>DD</sub> ≤ 5.5V | -0.05 | 0    | 0.5  | %VDD  |
| N <sub>pk-pk</sub>  | Output Noise                        |                               | -     | 0.05 | 0.2  | Deg   |

## Accuracy Parameters - PWM Output

| Symbol           | Parameters                                  | Test Conditions                                            | Min. | Typ.   | Max.   | Units |
|------------------|---------------------------------------------|------------------------------------------------------------|------|--------|--------|-------|
| RSP              | PWM Output Resolution                       |                                                            | -    | 12     | -      | bits  |
| J <sub>DC</sub>  | PWM % Duty Cycle Jitter (Open-Drain Output) | 125Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up        | -    | ±0.003 | ±0.016 | %DC   |
|                  |                                             | 250Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up        | -    | ±0.005 | ±0.02  | %DC   |
|                  |                                             | 500Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up        | -    | ±0.009 | ±0.035 | %DC   |
|                  |                                             | 1000Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up       | -    | ±0.003 | ±0.016 | %DC   |
|                  |                                             | 2000Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up       | -    | ±0.005 | ±0.02  | %DC   |
| J <sub>DC</sub>  | PWM % Duty Cycle Jitter (Push-Pull Output)  | 125Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up        | -    | ±0.003 | ±0.016 | %DC   |
|                  |                                             | 250Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up        | -    | ±0.005 | ±0.02  | %DC   |
|                  |                                             | 500Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up        | -    | ±0.009 | ±0.035 | %DC   |
|                  |                                             | 1000Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up       | -    | ±0.003 | ±0.016 | %DC   |
|                  |                                             | 2000Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up       | -    | ±0.005 | ±0.02  | %DC   |
| J <sub>PWM</sub> | PWM Frequency Jitter (Open-Drain Output)    | 125Hz-2000Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up | -    | ±0.04  | ±0.15  | Hz    |
| J <sub>PWM</sub> | PWM Frequency Jitter (Push-Pull Output)     | 125Hz-2000Hz, 4.7nF, R <sub>L</sub> =1kΩ, Resistor Pull-Up | -    | ±0.04  | ±0.15  | Hz    |

## Magnetic parameter

| Symbol     | Parameters                       | Test Conditions                                                                                                                                                           | Min. | Typ.     | Max. | Units |
|------------|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------|------|-------|
| $N_p$      | Magnetic Pole Number             |                                                                                                                                                                           | -    | 2        | -    |       |
| $B_x, B_y$ | XY Plane Magnetic Field Strength | $\sqrt{B_x^2 + B_y^2}$                                                                                                                                                    | -    | -        | 70   | mT    |
| $B_z$      | Z-Axis Magnetic Field Strength   |                                                                                                                                                                           | -    | -        | 126  | mT    |
| $B_{Norm}$ | Useful Magnetic Field Strength   | $\sqrt{B_x^2 + B_y^2}$ (X-Y mode)<br>$\sqrt{B_x^2 + \left(\frac{1}{G_{IMC}} B_z\right)^2}$ (X-Z mode)<br>$\sqrt{B_y^2 + \left(\frac{1}{G_{IMC}} B_z\right)^2}$ (Y-Z mode) | 10   | 20       | -    | mT    |
| $G_{IMC}$  | Imc Gain                         |                                                                                                                                                                           | -    | 1.19     | -    |       |
| $D_{mag}$  | Magnet Diameter                  |                                                                                                                                                                           | -    | 8        | -    | mm    |
| $H_{mag}$  | Magnet Thickness                 |                                                                                                                                                                           | -    | 2.5      | -    | mm    |
| AG         | Magnet To Chip Gap               |                                                                                                                                                                           | 2    | -        | 5    | mm    |
|            | Magnetic material                |                                                                                                                                                                           | -    | NdFeB 35 | -    |       |

## 10. Block Diagram

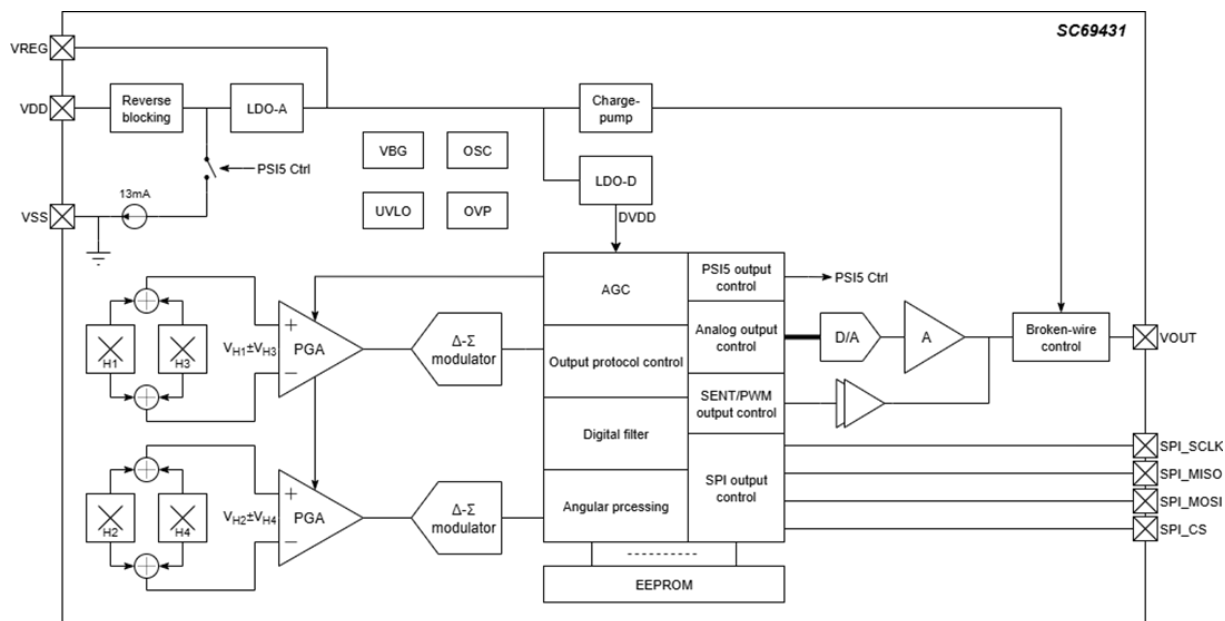


Fig.10 Functional block diagram

## 11. Function Description

### User programmable parameters

| Parameters                    | Description                                                             | Default |      |      |      | Bits |
|-------------------------------|-------------------------------------------------------------------------|---------|------|------|------|------|
|                               |                                                                         | -000    | -001 | -SPI | -PSI |      |
| General Parameter Settings    |                                                                         |         |      |      |      |      |
| MAP <sub>xyz</sub>            | Output mapping selection                                                | 0       | 0    | 0    | 0    | 3    |
| K                             | Sensitivity fitness coefficients for X(Y), Z                            | 1.5     | 1.5` | 1.5  | 1.5  | 15   |
| OUT_mode                      | Output mode                                                             | 1       | 2    | 0    | 4    | 3    |
| PWM_POL                       | PWM polarity                                                            | 0       | -    | -    | -    | 1    |
| PWMT                          | PWM frequency                                                           | 1000    | -    | -    | -    | 16   |
| OUT_CONFIG                    | PWM/SENT output configuration                                           | 3       | 3    | -    | -    | 2    |
| USER_ID1                      | User ID                                                                 | 0       | 0    | 0    | 0    | 8    |
| USER_ID2                      | User ID                                                                 | 0       | 0    | 0    | 0    | 8    |
| USER_ID3                      | User ID                                                                 | 0       | 0    | 0    | 0    | 8    |
| USER_ID4                      | User ID                                                                 | 0       | 0    | 0    | 0    | 8    |
| EEPROM_LOCK_CODE              | EEPROM lock code / EEPROM lock key                                      | 0       | 0    | 0    | 0    | 8    |
| SENT configuration parameters |                                                                         |         |      |      |      |      |
| SENT_FC_FORMAT                | SENT frame data format selection                                        | -       | 1    | -    | -    | 1    |
| SENT_CH2_DATA                 | Channel 2 data configuration                                            | -       | 2    | -    | -    | 2    |
| SENT_INIT_DATA                | SENT startup initialization data configuration                          | -       | 0    | -    | -    | 1    |
| SENT_NIBBLE_NUMBER            | Channel 2 data nibble count selection                                   | -       | 1    | -    | -    | 1    |
| SENT_TICK_TIME                | SENT tick time configuration                                            | -       | 0    | -    | -    | 3    |
| SENT_LEGACY_CRC               | CRC calculation options                                                 | -       | 0    | -    | -    | 1    |
| SENT_SERIAL_CONFIG            | Enhanced serial message selection                                       | -       | 1    | -    | -    | 1    |
| SENT_SLOW_EXTENDED            | Serial message sequence selection                                       | -       | 0    | -    | -    | 1    |
| SENT_SLOW_BFIELD              | Serial message extension sequence magnetic field configuration          | -       | 1    | -    | -    | 1    |
| SENT_PAUSE_OPTION             | Selection of the measurement mode and the corresponding output protocol | -       | 1    | -    | -    | 1    |
| SENT_REV                      | SENT version                                                            | -       | 4    | -    | -    | 3    |
| SENT_MAN_CODE                 | factory code                                                            | -       | 0    | -    | -    | 12   |
| SENT_FRAME_LENGTH             | frame length                                                            | -       | 297  | -    | -    | 10   |
| T_SENT                        | Slope control                                                           | 0       | 1    | 0    | 0    | 1    |
| SENT_SENSOR_TYPE              | Sensor type                                                             | -       | 0x50 | -    | -    | 8    |
| SENT_CHANNEL_X1               | CHANNEL X1                                                              | -       | 0    | -    | -    | 12   |

## User programmable parameters(Continued)

|                                      |                                             |   |   |   |                             |    |
|--------------------------------------|---------------------------------------------|---|---|---|-----------------------------|----|
| SENT_CHANNEL_X2                      | CHANNEL X2                                  | - | 0 | - | -                           | 12 |
| SENT_CHANNEL_Y1                      | CHANNEL Y1                                  | - | 0 | - | -                           | 12 |
| SENT_CHANNEL_Y2                      | CHANNEL Y2                                  | - | 0 | - | -                           | 12 |
| SENT_SENSOR_ID1                      | Sensor ID1                                  | - | 0 | - | -                           | 12 |
| SENT_SENSOR_ID2                      | Sensor ID2                                  | - | 0 | - | -                           | 12 |
| SENT_SENSOR_ID3                      | Sensor ID3                                  | - | 0 | - | -                           | 12 |
| SENT_SENSOR_ID4                      | Sensor ID4                                  | - | 0 | - | -                           | 12 |
| SENT_OEM_CODE1                       | OEM Code 1                                  | - | 0 | - | -                           | 12 |
| SENT_OEM_CODE2                       | OEM Code 2                                  | - | 0 | - | -                           | 12 |
| SENT_OEM_CODE3                       | OEM Code 3                                  | - | 0 | - | -                           | 12 |
| SENT_OEM_CODE4                       | OEM Code 4                                  | - | 0 | - | -                           | 12 |
| SENT_OEM_CODE5                       | OEM Code 5                                  | - | 0 | - | -                           | 12 |
| SENT_OEM_CODE6                       | OEM Code 6                                  | - | 0 | - | -                           | 12 |
| SENT_OEM_CODE7                       | OEM Code 7                                  | - | 0 | - | -                           | 12 |
| SENT_OEM_CODE8                       | OEM Code 8                                  | - | 0 | - | -                           | 12 |
| <b>PSI5 configuration parameters</b> |                                             |   |   |   |                             |    |
| PSI5_OUT_MODE                        | PSI5 Output Mode                            | - | - | - | 3                           | 2  |
| PSI5_PAYLOAD_SIZE                    | Effective data length                       | - | - | - | 20                          | 5  |
| PSI5_ERROR_DETECTION                 | Error Detection Methods                     | - | - | - | 0                           | 1  |
| PSI5_CYCLE_TIME                      | communications cycle                        | - | - | - | 0                           | 2  |
| PSI5_TRANSMIT_SPEED                  | data transfer speed                         | - | - | - | 1                           | 1  |
| PSI5_FORMAT_PRECISION                | Data frame format accuracy                  | - | - | - | 1                           | 1  |
| PSI5_TRIGGER_LEVEL                   | Synchronized pulse trigger level setting    | - | - | - | 1                           | 1  |
| PSI5_TS[1..4]_ENABLE                 | Timeslot Enable                             | - | - | - | 1                           | 1  |
| PSI5_TS[1..4]_SENSOR                 | Transmitted time slot data selection        | - | - | - | 0x1,0x0,<br>0x0,0x0         | 3  |
| PSI5_TS[1..4]_STARTTIME              | time slot start time                        | - | - | - | 0x0,0x0,<br>0x0,0x0         | 11 |
| PSI5_INIT_PHASES                     | Initialization Configuration                | - | - | - | 0x000,0x000,<br>0x000,0x000 | 2  |
| PSI5_INIT_I_DURATION                 | Initialization 1 phase cycle                | - | - | - | 0                           | 1  |
| PSI5_INIT_II_EXTRA_FIELDS            | Initialization 2 Stage Extended Data Enable | - | - | - | 1                           | 2  |
| PSI5_INIT_II_REPETITION              | Initialization 2-stage repetition count     | - | - | - | 0                           | 8  |
| PSI5_INIT_METAINFO                   | PSI5 version                                | - | - | - | 6                           | 4  |
| PSI5_INIT_INITLENGTH                 | Initialize data length                      | - | - | - | 9                           | 8  |
| PSI5_INIT_VENDORID                   | Supplier ID                                 | - | - | - | 6                           | 8  |



## User programmable parameters(Continued)

|                                                 |                                                              |      |   |   |     |    |
|-------------------------------------------------|--------------------------------------------------------------|------|---|---|-----|----|
| PSI5_INIT_SENSORTYPE                            | Sensor type                                                  | -    | - | - | 6   | 4  |
| PSI5_INIT_SENSORPARAMS                          | Sensor specified parameters                                  | -    | - | - | 0   | 8  |
| PSI5_INIT_SENSORCODE                            | Sensor Manufacturer Specified Parameters                     | -    | - | - | 0   | 8  |
| PSI5_INIT_SENSORAPPCODE                         | Product version information                                  | -    | - | - | 0   | 12 |
| PSI5_INIT_PRODUCTIONDATE                        | date of manufacture                                          | -    | - | - | 0   | 16 |
| <b>Diagnostic Function Setting</b>              |                                                              |      |   |   |     |    |
| DIAG_EN                                         | Diagnostic Enable Bit                                        |      |   |   | 1   | 1  |
| DIAG_MASK                                       | Diagnostic Mask Register                                     |      |   |   | 128 | 8  |
| DC_FAULT                                        | Output duty cycle of PWM when supply voltage is too low      |      |   |   | 0   | 8  |
| DC_FTL                                          | Output duty cycle of PWM when magnetic field is too low      |      |   |   | 0   | 8  |
| GAIN_THRESHOLD_LOW                              | Analog op amp second stage gain low thresholds               |      |   |   | 0   | 5  |
| GAIN_THRESHOLD_HIGH                             | Analog op amp second stage gain high thresholds              |      |   |   | 31  | 5  |
| FIELDTHOLD_LOW                                  | low field strength threshold                                 |      |   |   | 0   | 8  |
| FIELDTHOLD_HIGH                                 | High field strength threshold                                | -    | - | - | 255 | 8  |
| TEMPTHRESHOLD_LOW                               | low-temperature threshold                                    | -    | - | - | 0   | 7  |
| TEMPTHRESHOLD_HIGH                              | elevation threshold                                          | -    | - | - | 127 | 7  |
| DIAG_DEBOUNCE                                   | Diagnostic de-jittering time                                 | -    | - | - | 0   | 3  |
| <b>Linear Transfer Curve Setting Parameters</b> |                                                              |      |   |   |     |    |
| OUTSLOPE_COLD                                   | Low Temperature Angle Compensation Factor                    | 100% | - | - | -   | 16 |
| OUTSLOPE_HOT                                    | High temperature angle compensation factor                   | 0%   | - | - | -   | 16 |
| CLAMP_HIGH                                      | Output High Clamp                                            | 0    | - | - | -   | 16 |
| CLAMP_LOW                                       | Output Low Clamp                                             | 1    | - | - | -   | 1  |
| DP                                              | Breakpoint/Zero Point                                        | 360  | - | - | -   | 16 |
| CW                                              | direction of rotation                                        | 3    | - | - | -   | 2  |
| WORK_RANGE_GAIN                                 | 16-point/32-point calibrated operating angle range (degrees) | 0    | 0 | 0 | 0   | 16 |
| LNR_POINTS                                      | Calibration point selection                                  | 0    | 0 | 0 | 0   | 16 |
| LNR_A_X                                         | 4-point calibration , X-axis coordinates (angle)             | 0    | 0 | 0 | 0   | 16 |
| LNR_B_X                                         |                                                              | 0    | 0 | 0 | 0   | 16 |
| LNR_C_X                                         |                                                              | 0    | 0 | 0 | 0   | 16 |
| LNR_D_X                                         |                                                              | 0    | 0 | 0 | 0   | 16 |
| LNR_A_Y                                         | 4-point calibration, Y-axis coordinates (%VDD )              | 0    | 0 | 0 | 0   | 16 |
| LNR_B_Y                                         |                                                              | 0    | 0 | 0 | 0   | 16 |
| LNR_C_Y                                         |                                                              | 0    | 0 | 0 | 0   | 16 |
| LNR_D_Y                                         |                                                              | 0    | 0 | 0 | 0   | 16 |

|                    |                                                                      |   |   |   |   |       |
|--------------------|----------------------------------------------------------------------|---|---|---|---|-------|
| LNR_A_S            | 4-point calibration, slope of each segment                           | 0 | 0 | 0 | 0 | 16    |
| LNR_B_S            |                                                                      | 0 | 0 | 0 | 0 | 16    |
| LNR_C_S            |                                                                      | 0 | 0 | 0 | 0 | 16    |
| LNR_D_S            |                                                                      | 0 | 0 | 0 | 0 | 16    |
| LNR4_S0            | 4-point calibration, initial slope                                   | 0 | 0 | 0 | 0 | 16    |
| LNR4_Y5            | 4-point calibration, endpoint Y coordinate                           | 0 | 0 | 0 | 0 | 16    |
| LNR_Y0             | 4-point, 16-point/32-point calibration of initial point Y-coordinate | 0 | 0 | 0 | 0 | 16    |
| LNR9_Yn            | 8-point calibration, Y-axis coordinates (n=0~8)                      | 0 | 0 | 0 | 0 | 9x16  |
| LNR9_Xn            | 8-point calibration, X-axis coordinates (n=0~8)                      | 0 | 0 | 0 | 0 | 9x16  |
| LNR17_Yn           | 16-point calibration, Y-axis coordinates (n=0~15)                    | 0 | 0 | 0 | 0 | 17x16 |
| LNR_DELTA_Yn       | 32-point calibration, Y-axis coordinates (offset %) (n=0~31)         | 0 | 0 | 0 | 0 | 32x8  |
| LNR_DELTA_Y_EXPAND | 32-point calibration, Y-axis coordinate deviation range setting      | 0 | 0 | 0 | 3 | 2     |

## Output mapping selection

MAPXYZ is used to define which magnetic field is used to calculate the angle.

| Parameters   | Value | Description     |
|--------------|-------|-----------------|
| MAPXYZ [2:0] | 0     | XY Mode         |
|              | 2     | XZ Mode         |
|              | 3     | YZ model        |
|              | 4     | XYZ 3-axis mode |

## K-factor

When no mapping is selected (B1=X, B2=Y), k defines the sensitivity mismatch coefficient applied to B1 or B2. When Mapping (B1=X, B2=Y) is selected, this parameter is not used. This parameter is factory fine-tuned for Mapping (B1=Z, B2=X). It is recommended to fine-tune it when a smaller linearity error is required and a mapping different from (B1=X, B2=Y) is selected.

## Output Mode

The SC69431 provides five output modes: proportional analog output, PWM output, SENT output SPI bus output, and PSI5 output. PWM and SENT support open drain output and push-pull output, while SPI only supports push-pull output.

## Analog Output Mode

| Parameters     | Value | Description   |
|----------------|-------|---------------|
| OUT mode 【2:0】 | 0     | SPI output    |
|                | 1     | analog output |
|                | 2     | SENT          |
|                | 3     | PWM           |
|                | 4     | PSI5          |
|                | 5     | Save          |
|                | 6     | Save          |
|                | 7     | Save          |

## Digital pattern output settings

| Parameters       | Value | Description                    |
|------------------|-------|--------------------------------|
| OUT_CONFIG 【1:0】 | 0     | Digital high-impedance output  |
|                  | 1     | Digital output NMOS Open Drain |
|                  | 2     | Digital output PMOS Open Drain |
|                  | 3     | Digital push-pull output       |

## PWM Output Mode - Polarity Setting

| Parameters | Value | Description |
|------------|-------|-------------|
| PWM POL    | 0     | active low  |
|            | 1     | active high |

## PWM Output Mode - Frequency Setting

| Parameters  | Value      | Description          |
|-------------|------------|----------------------|
| PWMT 【15:0】 | 2000-40000 | 100-2000Hz Frequency |

## PWM Output Waveform

PWM is set to PWM\_POL=0, PWMT=1000Hz output duty cycle 0.0244%

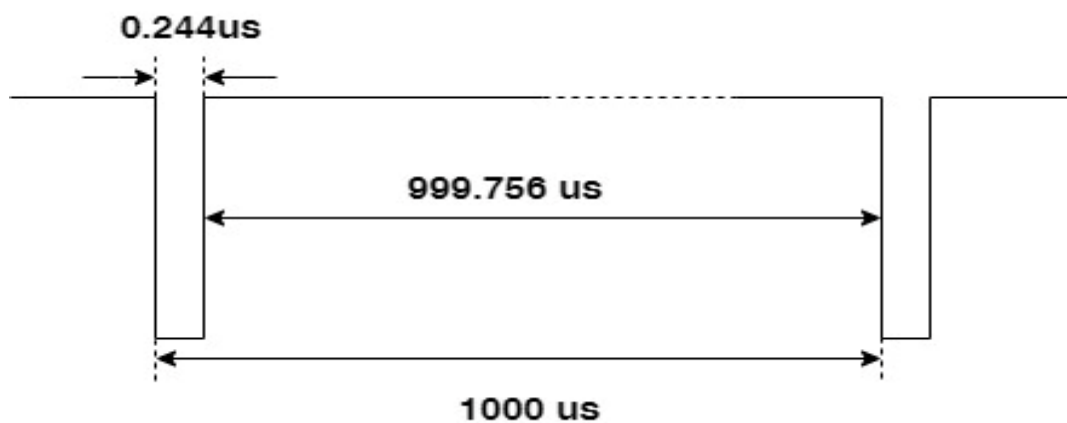


Fig.11 PWM output waveform at PWM\_POL=0

PWM is set to PWM\_POL=1, PWMT=1000Hz, output duty cycle 0.0244%

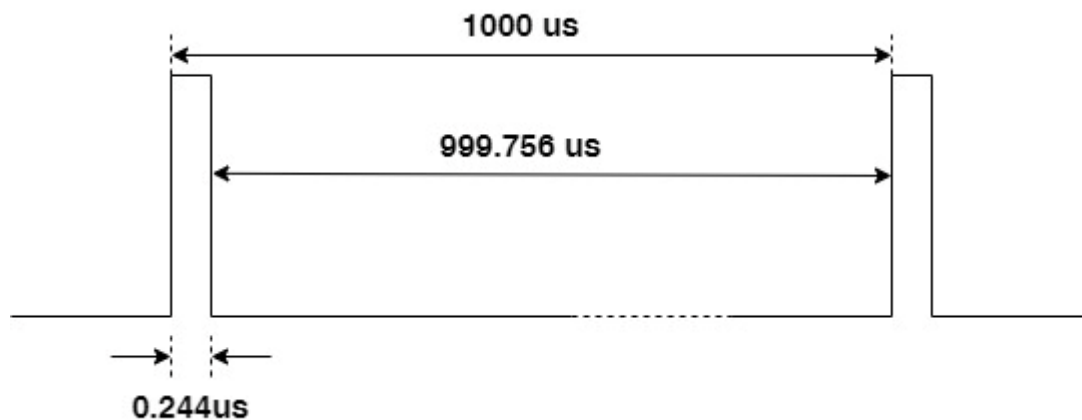


Fig.12 PWM output waveform when PWM\_POL=1

## SENT Protocol Output

The digital SENT output of the SC69431 is compatible with SAE J2716 APR2016.

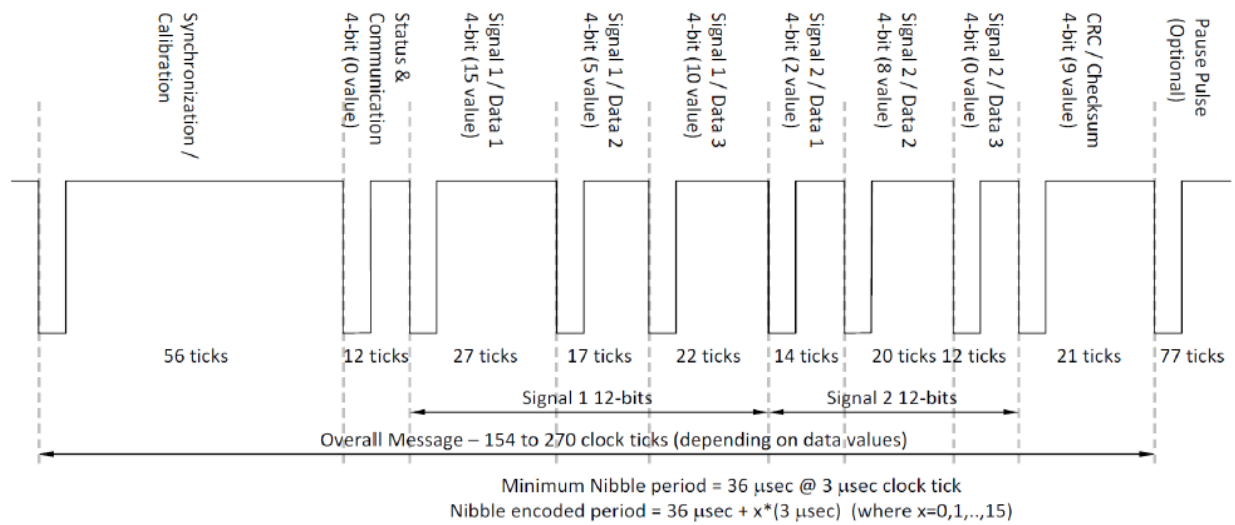


Fig.13 2-channel 12-bit data SENT message format example

## SENT Protocol Output - SENT Fast Frame Data Format Selection

| Parameters     | Value | Description                    |
|----------------|-------|--------------------------------|
| SENT_FC_FORMAT | 0     | Dual Throttle Position Sensor  |
|                | 1     | Single safety position sensors |

## SENT Protocol Output - A.1 Dual Throttle Position Sensor Data Frame

The SC69431 sends a string of data words based on the dual throttle position sensors defined in SAE J2716 Appendix A.1. CH1 always sends 12-bit sensor data, while the CH2 channel content is set by SENT CH2 DATA.

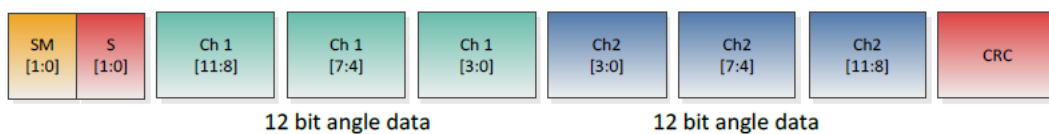


Fig.14 A.1 Dual Throttle Position Sensor Data Frame

## SENT Protocol Output - Channel 2 configures the number of nibbles

| Parameters             | Value | Description |
|------------------------|-------|-------------|
| SENT_NIBBLE_NUMBER [0] | 0     | 6 nibbles   |
|                        | 1     | 3 nibbles   |

## SENT Protocol Output - Channel 2 Configuration Data

| Parameters          | Value | Description                    |
|---------------------|-------|--------------------------------|
| SENT CH2 DATA [1:0] | 0     | 12-bit temperature sensor data |
|                     | 1     | 0xFF9(4089)-CH1                |
|                     | 2     | User-defined 12-bit data       |
|                     | 3     | 0xFFF(4095)-CH1                |

## SENT Protocol Output - A.3 Single Safe Position Sensor Data Frame

The SC69431 transmits a single safe position sensor as defined in SAE J2716 Appendix A.3 that contains the 12-bit sensor angle data and roll counter for the CH1 channel as well as the high 4 bits of angle data inverted.




Fig.15 A.3 Single safe position sensor data frame

## SENT Protocol Output - Initialize startup frame

| Parameters           | Value | Description               |
|----------------------|-------|---------------------------|
| SENT INIT DATA [1:0] | 0     | OEM Requirements - 0xFFFF |
|                      | 1     | SAE Compatible-0x000      |

## SENT Protocol Output - SENT tick time configuration

| Parameters      | Value | Description         |
|-----------------|-------|---------------------|
| TICK_TIME [2:0] | 0     | 3.0us Standard SENT |
|                 | 1     | Save                |
|                 | 2     | Save                |
|                 | 3     | 1.5us Fast SENT     |
|                 | 4     | Save                |
|                 | 5     | Save                |
|                 | 6     | 6.0us Slow SENT     |
|                 | 7     | Save                |

## SENT Protocol Output - Frame length setting

| Parameters              | Value             | Description          |
|-------------------------|-------------------|----------------------|
| SENT_FRAME_LENGTH [9:0] | Default 297 ticks | Frame length setting |

## SENT Protocol Output - SENT CRC version selection

| Parameters          | Value | Description                |
|---------------------|-------|----------------------------|
| SENT_LEGACY_CRC [0] | 0     | Versions from 2010 onwards |
|                     | 1     | 2007                       |

## SENT Protocol Output - SENT version selection

| Parameters     | Value | Description          |
|----------------|-------|----------------------|
| SENT_REV [2:0] | 0     | No version specified |
|                | 1     | 2007                 |
|                | 2     | 2008                 |
|                | 3     | 2010                 |
|                | 4     | 2016                 |

SENT Protocol Output - Enhanced Serial Messaging

Enhanced Serial Messaging is a communication protocol that allows the transmission of large amounts of data and message IDs, serial data is transmitted via Status and Communication Nibble bits 2 and 3 SM [1:0]. As shown a serial message frame consists of 18 consecutive SENT data messages, all 18 frames must be successfully received (no errors, calibration pulse changes, data byte CRC errors, etc.).

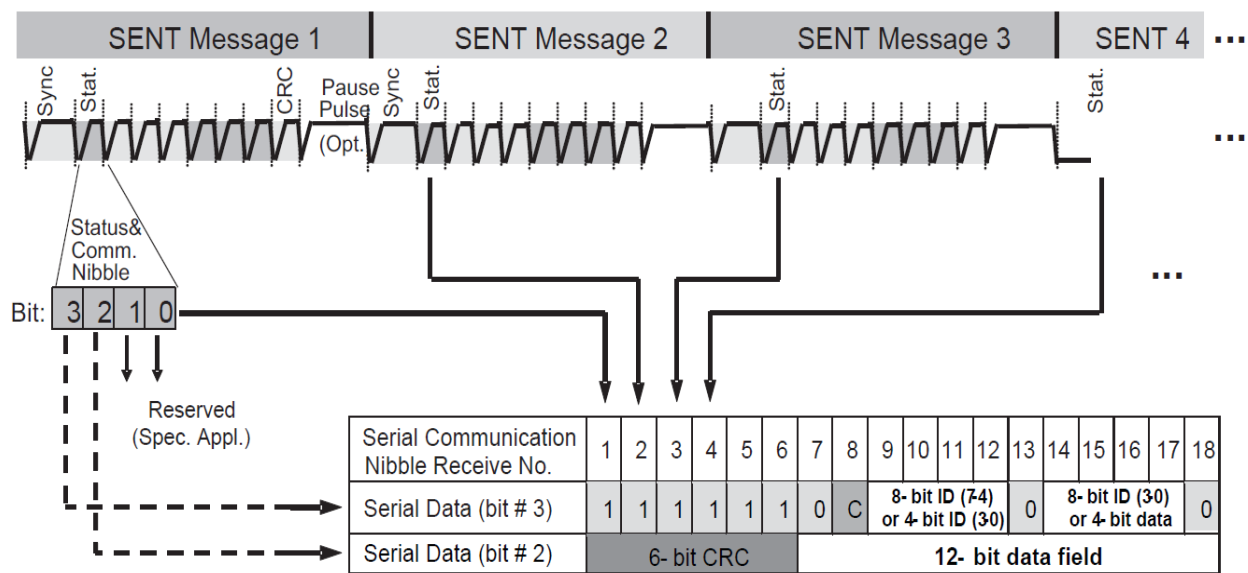


Fig.16 Enhanced Serial Message Data Format

An Enhanced Serial Message contains an Enhanced Serial Message with 12 bits of data and an 8-bit Message ID. SM[0] contains a 6-bit CRC followed by 12 bits of data. The message content is defined by the 8-bit message ID transmitted in the SM[1] channel. By default, a short sequence of 24 data is transmitted. Optionally, an extended sequence can be used so that a cycle of 40 data is transmitted.

In addition, at the end of the sequence (short or extended), the standard value of the magnetic field detected by the sensor can optionally be returned.



| Num                      | 8-Bit Id | Element                   | Description          |
|--------------------------|----------|---------------------------|----------------------|
| <b>Standard sequence</b> |          |                           |                      |
| 1                        | 0x01     | Diagnostic error code     | Diagnostic register  |
| 2                        | 0x06     | SENT standard revision    | SENT_REV             |
| 3                        | 0x01     | Diagnostic error code     | Diagnostic register  |
| 4                        | 0x05     | Manufacturer code         | SENT_MAN_CODE        |
| 5                        | 0x01     | Diagnostic error code     | Diagnostic register  |
| 6                        | 0x03     | Channel 1 / 2 Sensor type | SENT_SENSOR_TYPE     |
| 7                        | 0x01     | Diagnostic error code     | Diagnostic register  |
| 8                        | 0x07     | Fast channel 1: X1        | SENT_CHANNEL_X1      |
| 9                        | 0x01     | Diagnostic error code     | Diagnostic register  |
| 10                       | 0x08     | Fast channel 1: X2        | SENT_CHANNEL_X2      |
| 11                       | 0x01     | Diagnostic error code     | Diagnostic register  |
| 12                       | 0x09     | Fast channel 1: Y1        | SENT_CHANNEL_Y1      |
| 13                       | 0x01     | Diagnostic error code     | Diagnostic register  |
| 14                       | 0x0A     | Fast channel 1: Y2        | SENT_CHANNEL_Y2      |
| 15                       | 0x01     | Diagnostic error code     | Diagnostic register  |
| 16                       | 0x23     | (Internal) temperature    | Temperature register |
| 17                       | 0x01     | Diagnostic error code     | Diagnostic register  |
| 18                       | 0x29     | Sensor ID #1              | SENT_SENSOR_ID1      |
| 19                       | 0x01     | Diagnostic error code     | Diagnostic register  |
| 20                       | 0x2A     | Sensor ID #2              | SENT_SENSOR_ID2      |
| 21                       | 0x01     | Diagnostic error code     | Diagnostic register  |
| 22                       | 0x2B     | Sensor ID #3              | SENT_SENSOR_ID3      |
| 23                       | 0x01     | Diagnostic error code     | Diagnostic register  |
| 24                       | 0x2C     | Sensor ID #4              | SENT_SENSOR_ID4      |
| <b>Extended sequence</b> |          |                           |                      |
| 25                       | 0x01     | Diagnostic error code     | Diagnostic register  |
| 26                       | 0x90     | OEM Code #1               | SENT_OEM_CODE1       |
| 27                       | 0x01     | Diagnostic error code     | Diagnostic register  |
| 28                       | 0x91     | OEM Code #2               | SENT_OEM_CODE2       |
| 29                       | 0x01     | Diagnostic error code     | Diagnostic register  |
| 30                       | 0x92     | OEM Code #3               | SENT_OEM_CODE3       |
| 31                       | 0x01     | Diagnostic error code     | Diagnostic register  |
| 32                       | 0x93     | OEM Code #4               | SENT_OEM_CODE4       |

|                                 |      |                       |                                                      |
|---------------------------------|------|-----------------------|------------------------------------------------------|
| 33                              | 0x01 | Diagnostic error code | Diagnostic register                                  |
| 34                              | 0x94 | OEM Code #5           | SENT_OEM_CODE5                                       |
| 35                              | 0x01 | Diagnostic error code | Diagnostic register                                  |
| 36                              | 0x95 | OEM Code #6           | SENT_OEM_CODE6                                       |
| 37                              | 0x01 | Diagnostic error code | Diagnostic register                                  |
| 38                              | 0x96 | OEM Code #7           | SENT_OEM_CODE7                                       |
| 39                              | 0x01 | Diagnostic error code | Diagnostic register                                  |
| 40                              | 0x97 | OEM Code #8           | SENT_OEM_CODE8                                       |
| <b>Magnetic field expansion</b> |      |                       |                                                      |
| 41                              | 0x80 | Field Strength        | Magnetic Field Strength Register (Extended Sequence) |

### SENT Protocol Output - Enhanced Serial Message Slow Channel Selection

| Parameters    | Value | Description                                    |
|---------------|-------|------------------------------------------------|
| SERIAL_CONFIG | 0     | Disable Enhanced Serial Messaging Slow Channel |
|               | 1     | Enable Enhanced Serial Message Slow Channel    |

### SENT Protocol Output - Enhanced Serial Message Sequence Selection

| Parameters         | Value | Description                                |
|--------------------|-------|--------------------------------------------|
| SENT_SLOW_EXTENDED | 0     | Short-sequence serial message selection    |
|                    | 1     | Extended Sequence Serial Message Selection |

### SENT Protocol Output - When the expansion sequence is enabled, you can configure whether to use the magnetic field expansion

| Parameters       | Value | Description                   |
|------------------|-------|-------------------------------|
| SENT_SLOW_BFIELD | 0     | No magnetic field expansion   |
|                  | 1     | With magnetic field expansion |

### SENT Protocol Output - PAUSE Configuration

| Parameters        | Value | Description                                                     |
|-------------------|-------|-----------------------------------------------------------------|
| SENT_PAUSE_OPTION | 0     | Continuous asynchronous angle acquisition, no pause bit in SENT |
|                   | 1     | Continuous synchronized angle acquisition, SENT with pause bit  |

## PSI5 Protocol Output

According to the PSI5 protocol specification, information is transmitted by modulating the current at the power supply pin VDD. the SC69431 is compliant with the PSI5 Protocol Specification v2.3, forward compatible with v2.1 and v1.3.

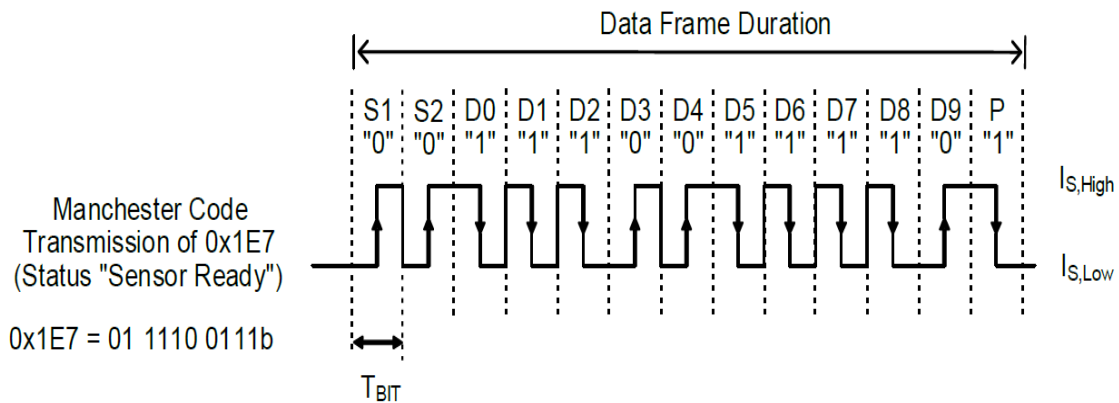


Fig.17 PSI5 Manchester coding format

## PSI5 Protocol Output - Data Frame Format

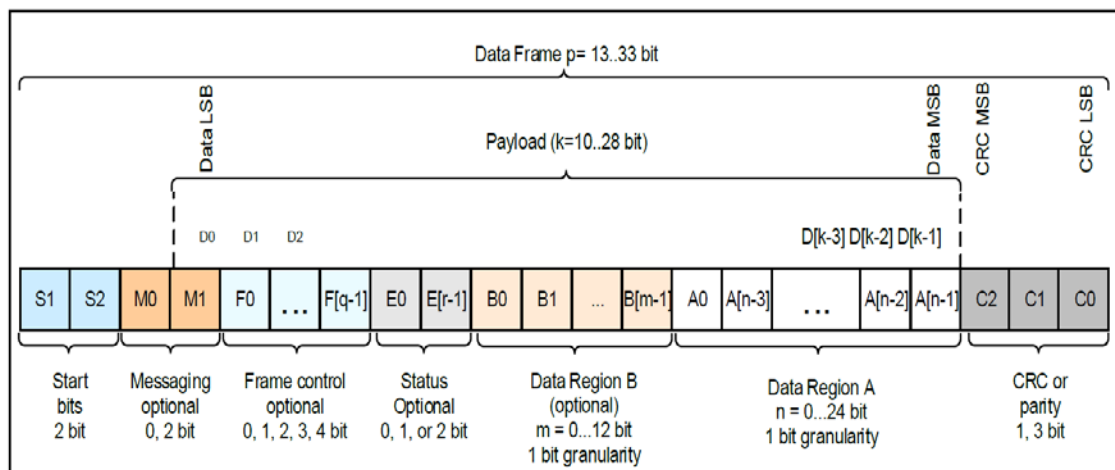


Fig.18 PSI5 data frame format

## PSI5 Protocol Output - Error Detection Methods

| Parameters                 | Value | Description  |
|----------------------------|-------|--------------|
| PSI5_ERROR_DETECTION 【1:0】 | 0     | CRC mode     |
|                            | 1     | Parity check |

## PSI5 Protocol Output - Data Length

| Parameters                     | Value | Description          |
|--------------------------------|-------|----------------------|
| PSI5_PAYLOAD_SIZE 【4:0】        | 8-24  | Data length          |
| PSI5_FORMAT_PRECISION          | 0     | Low precision        |
|                                | 1     | Highly accurate      |
| PSI5_FORMAT_PRECISION          | 0     | Closing time slots   |
|                                | 1     | Enable time slots    |
| PSI5_TSx_SENSOR 【2:0】          | 0     | Angular data         |
|                                | 1     | -                    |
|                                | 2     | Temp                 |
|                                | 3     | Magnetic fields      |
|                                | 4     | -                    |
| PSI5_TS[1..4]_STARTTIME 【10:0】 | 11    | Time slot start time |

## PSI5 Protocol Output - PSI5 Current Modulation Method

The data frame is transmitted via a current consumption modulator with Manchester coding. The low level ( $I_{S, Low}$ ) indicates the static current consumption of the sensor and the high level ( $I_{S, High}$ ) is generated by the increase of the sensor Sink current ( $I_{S, Low} + \Delta I_S$ ). ( $I_{S, Low} + \Delta I_S$ ) and a high level ( $I_{S, High}$ ) is generated by an increase in sensor Sink current ( $I_{S, Low} + \Delta I_S$ ). Selectable sink current ( $\Delta I_S$ ) and bit duration ( $T_{BIT}$ ).

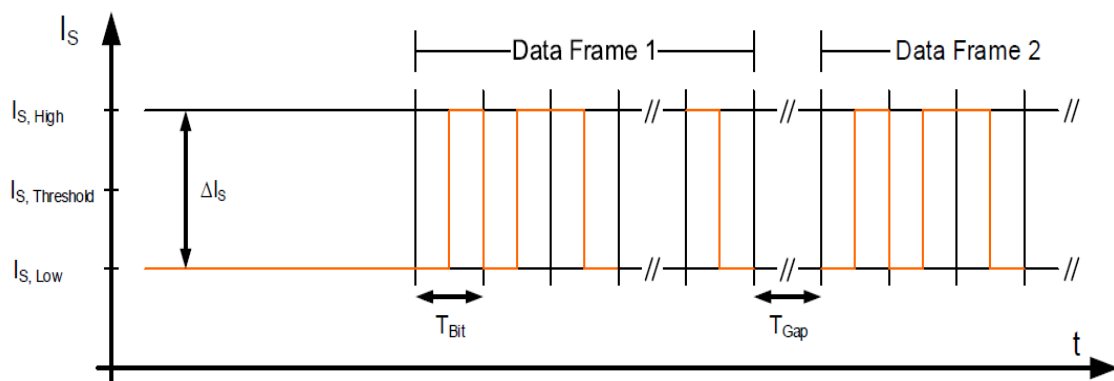


Fig.19 PSI5 data current modulation

| Parameters | Value | Description |
|------------|-------|-------------|
|------------|-------|-------------|

|                           |   |                      |
|---------------------------|---|----------------------|
| PSI5_LOWCOMMON_MODE 【1:0】 | 0 | Low current 13mA     |
|                           | 1 | Normal current 26 mA |

## PSI5 communication mode

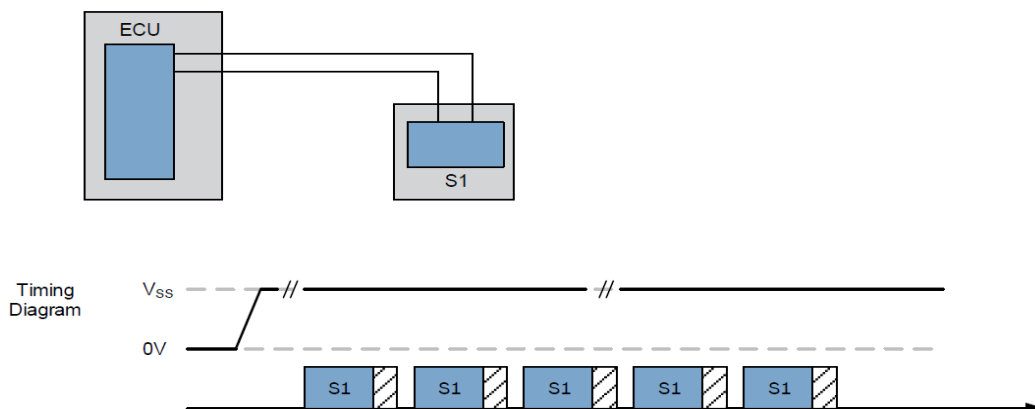


Fig.20 PSI5 Asynchronous mode

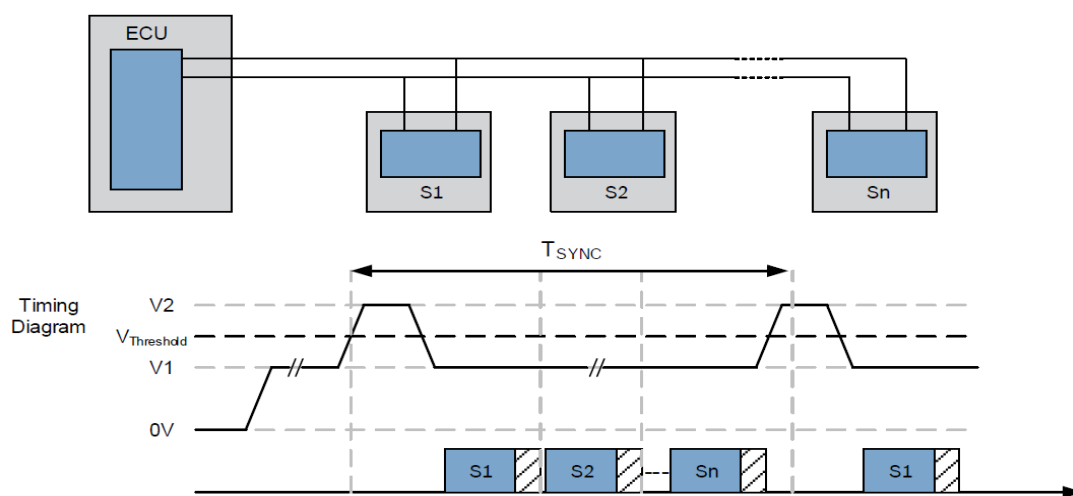


Fig.21 PSI5 Synchronous parallelism

## PSI5 Protocol Output - Output Mode

| Parameters          | Value | Description             |
|---------------------|-------|-------------------------|
| PSI5_OUT_MODE 【1:0】 | 2     | Asynchronous mode       |
|                     | 3     | Synchronous parallelism |

## PSI5 Protocol Output - Cycle Time

| Parameters          | Value | Description |
|---------------------|-------|-------------|
| PSI5_OUT_MODE 【1:0】 | 0     | 300us       |
|                     | 1     | 500us       |
|                     | 2     | 1000us      |

## PSI5 Protocol Output - Transmission Speed

| Parameters          | Value | Description          |
|---------------------|-------|----------------------|
| PSI5_TRANSMIT_SPEED | 0     | Low speed 125 kbit/s |
|                     | 1     | High speed 189kbit/s |

## PSI5 Protocol Output - Setting of Synchronous Pulse Trigger Time

| Parameters         | Value | Description                    |
|--------------------|-------|--------------------------------|
| PSI5_TRIGGER_LEVEL | 0     | Reduced synchronization pulses |
|                    | 1     | Standard Synchronized Pulse    |

## PSI5 Protocol Output - Synchronized Pulse Trigger Level Setting

| Parameters   | Value | Description                                     |
|--------------|-------|-------------------------------------------------|
| PSI5_SYNC_TH | 0     | Standard synchronous pulse trigger threshold    |
|              | 1     | Reduced synchronization pulse trigger threshold |

## PSI5 Protocol Output - Sensor Initialization

| Initialization Phase 1 | Initialization Phase 2 | Initialization Phase 3 | Operating Mode        |
|------------------------|------------------------|------------------------|-----------------------|
| Activate (a plan)      | Data content           | State of affairs       | Sensor or status data |

## PSI5 Protocol Output - Initialization Function Configuration

| Parameters             | Value | Description                         |
|------------------------|-------|-------------------------------------|
| PSI5_INIT_PHASES 【1:0】 | 0     | Normal initialization               |
|                        | 1     | Close initialization phase 2        |
|                        | 2     | Close initialization phases 2 and 3 |
|                        | 3     | Save                                |

### PSI5 Protocol Output - Initialization Phase 1 Cycle

| Parameters                 | Value | Description |
|----------------------------|-------|-------------|
| PSI5_INIT_I_DURATION 【7:0】 | 100   | 50-200ms    |

### PSI5 Protocol Output - Length of initialization phase 2

| Parameters          | Value | Description |
|---------------------|-------|-------------|
| PSI5_INIT_LEN 【7:0】 | 9     | D1-D9       |
|                     | 32    | D1-D32      |

### PSI5 Protocol Output - Number of repetitions in initialization phase 2

| Parameters                    | Value | Description      |
|-------------------------------|-------|------------------|
| PSI5_INIT_II_REPETITION 【1:0】 | 0-3   | Repeat 1-4 times |

### PSI5 Protocol Output - Initialize phase 2 data content

| Parameters    | Data field   | Value                    | Description                                     |
|---------------|--------------|--------------------------|-------------------------------------------------|
| Forced data   |              |                          |                                                 |
| 1             | F1(D1)       | PSI5_INIT_METAINFO       | PSI5 version                                    |
| 2             | F2(D2, D3)   | PSI5_INIT_INITLENGTH     | Initialize data length                          |
| 3             | F3(D4, D5)   | PSI5_INIT_VENDORID       | Supplier ID                                     |
| 4             | F4(D6, D7)   | PSI5_INIT_SENSORTYPE     | Sensor type                                     |
| 5             | F5(D8, D9)   | SI5_INIT_SENSORPARAMS    | Sensor specified parameters                     |
| Extended data |              |                          |                                                 |
| 6             | F6(D10, D11) | PSI5_INIT_SENSORCODE     | Parameters specified by the sensor manufacturer |
| 7             | F7(D12-D14)  | PSI5_INIT_SENSORAPPCODE  | Product version information                     |
| 8             | F8(D15-D18)  | PSI5_INIT_PRODUCTIONDATE | production date                                 |
| 9             | F9(D19-D22)  | SEMI_ID                  | SEMI_ID                                         |

### PSI5 Protocol Output - Initialization Phase 3

| Parameters      | Value | Description |
|-----------------|-------|-------------|
| "Sensor ready"  | 0x1E7 | status data |
| "Sensor defect" | 0x1F4 | status data |

### PSI5 Protocol Output - Number of repetitions in initialization phase 3

| Parameters                     | Value | Description        |
|--------------------------------|-------|--------------------|
| PSI5_INIT_III_REPETITION 【7:0】 | 0-255 | Repeat 1-256 times |

### Four-Wire SPI Protocol Output (Slave)

SC69431 SPI is used as a full-duplex serial communication, in one master-slave communication the host can send commands and receive the result of the last command at the same time. SC69431 is used as a slave and is controlled by the chip-select signal, SPI\_CS. SPI communication is activated when SPI\_CS is set to a low level, and SPI communication is terminated when SPI\_CS is set to high. SPI\_SCLK is used as a clock for SPI communication, which is sent from the host to SC69431. The signals of MISO and MOSI are changed on the rising edge of the clock and captured on the falling edge of the clock. SCLK is used as the clock for SPI communication and is sent from the host computer to the SC69431. The signals of MISO and MOSI are changed on the rising edge of the clock and are captured on the falling edge of the clock.

| Command                          | Data transmission direction    | Byte 0              | Byte 1         | Byte 2     | Byte 3 |
|----------------------------------|--------------------------------|---------------------|----------------|------------|--------|
| Reads 18-bit angle values        | master-to-slave                | 0x54                | 0x00           | 0x00       | CRC8   |
|                                  | slave to master <sup>(1)</sup> | 0x54   Angle[17:16] | Angle[15:8]    | Angle[7:0] | CRC8   |
| Read the temperature             | master-to-slave                | 0x7C                | 0x00           | 0x00       | CRC8   |
|                                  | slave to master                | 0x7C                | Temp[11:8]     | Temp[7:0]  | CRC8   |
| Read the magnetic field strength | master-to-slave                | 0x7D                | 0x00           | 0x00       | CRC8   |
|                                  | slave to master                | 0x7D                | 0x00           | Value[7:0] | CRC8   |
| Read XYZ                         | master-to-slave                | 0x64                | X:87 Y:89 Z:8B | 0x00       | CRC8   |
|                                  | slave to master                | 0x64                | XYZ[15:8]      | XYZ[7:0]   | CRC8   |

Note:

(1) Target Output angle Angle = (AngleH << 8 + AngleL) / 262144 \* 360



## Traceable Information

At the factory, each device contains the Semiment factory ID and user ID for traceable purposes.

| Parameters     | Value   |
|----------------|---------|
| USER_ID1 【7:0】 | 0-255   |
| USER_ID2 【7:0】 | 0-255   |
| USER_ID3 【7:0】 | 0-255   |
| USER_ID4 【7:0】 | 0-255   |
| SEMI_ID 【15:0】 | 0-65535 |

## EEPROM Write Protection

| Parameters             | Value        | Description                              |
|------------------------|--------------|------------------------------------------|
| EEPROM_LOCK_CODE 【6:0】 | 0xAD         | EEPROM read-only                         |
|                        | Other values | EEPROM can be read, written, and erased. |

## Diagnostic

### ● Diagnostic Enable

| Parameters | Value | Description        |
|------------|-------|--------------------|
| DIAG_EN    | 0     | Close Diagnostics  |
|            | 1     | Enable Diagnostics |

### ● Diagnostic Mask Register

corresponding to mask position 0, the fault will not trigger diagnosis; corresponding to mask position 1, the fault will trigger diagnosis.

| BIT7               | BIT6           | BIT5              | BIT4                  | BIT3            | BIT2                   | BIT1         | BIT0                 |
|--------------------|----------------|-------------------|-----------------------|-----------------|------------------------|--------------|----------------------|
| CRC Checksum Error | GAINF overflow | Current diagnosis | Digital Voltage Fault | CORDIC overflow | Fieldstrength overflow | ADC overflow | Temperature overflow |

## ● Analog Diagnostic Settings

| Parameters    | Value | Description                          |
|---------------|-------|--------------------------------------|
| DIAG_MO 【1:0】 | 0     | Digital High Resistance State Output |
|               | 1     | Digital Output NMOS OpenDrain        |
|               | 2     | Digital Output PMOS OpenDrain        |
|               | 3     | Digital push-pull output             |

## ● PWM Diagnostic Settings

| Parameters     | Value | Description                                             |
|----------------|-------|---------------------------------------------------------|
| DC_FAULT 【7:0】 | 0-255 | Output duty cycle of PWM when supply voltage is too low |
| DC_FTL 【7:0】   | 0-255 | Output duty cycle of PWM when magnetic field is too low |

## ● Diagnostic Threshold

| 参数                        | 数值    | 描述                                                                |
|---------------------------|-------|-------------------------------------------------------------------|
| GAIN_THRESHOLD_LOW 【4:0】  | 0-31  | Low threshold of gain for the second-stage operational amplifier  |
| GAIN_THRESHOLD_HIGH 【4:0】 | 0-31  | High threshold of gain for the second-stage operational amplifier |
| TEMPTHRESHOLD_LOW 【6:0】   | 0-127 | low temperature threshold                                         |
| TEMPTHRESHOLD_HIGH 【6:0】  | 0-127 | high temperature threshold                                        |
| FIELDTHOLD_LOW 【7:0】      | 0-255 | Low threshold of field strength                                   |
| FIELDTHOLD_HIGH 【7:0】     | 0-255 | High threshold of field strength                                  |

## ● Diagnostic debounce time setting

| Parameters          | Value | STEP_UP TIME(ms) | STEP_DOWN TIME(ms) |
|---------------------|-------|------------------|--------------------|
| DIAG_DEBOUNCE 【2:0】 | 0     | 20               | 20                 |
|                     | 1     | 20               | 30                 |
|                     | 2     | 20               | 40                 |
|                     | 3     | 40               | 40                 |
|                     | 4     | 60               | 80                 |
|                     | 5     | 80               | 100                |
|                     | 6     | 100              | 120                |
|                     | 7     | 120              | 140                |

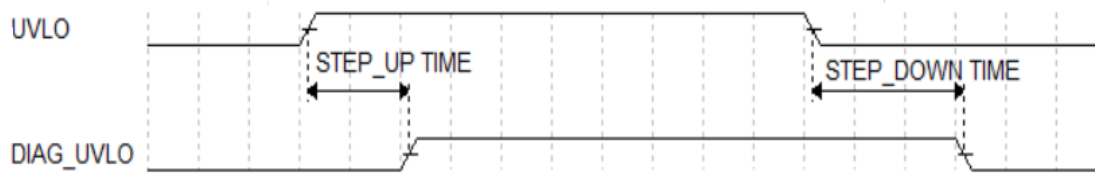


Fig.22 Diagnostic de-jittering timings

## Output Clamp Setting

The output clamp setting is used to limit the output voltage range. CLAMP\_LOW sets the output voltage minimum and CLAMP\_HIGH sets the output voltage maximum. Both parameters work for 4-point, 8-point, 16-point, and 32-point correction modes.

| Parameters | Value  | Description |
|------------|--------|-------------|
| CLAMP_LOW  | 0-100% | 低钳位         |
| CLAMP_HIGH | 0-100% | 高钳位         |

## Breakpoint/Zero-DP

The breakpoint and zero point of the SC69431 are the same point, which can be programmed at any point on the circumference, and all angles are based on the breakpoint or zero point. DP is the jump point between 0 and 360 degrees, for applications with less than 360 degrees of travel, DP should not be set in the same position as the start of the working travel, but must be set outside the working travel.




Fig.23 Schematic diagram of DP points

| Parameters | Value | Description               |
|------------|-------|---------------------------|
| DP         | 0-360 | Breakpoint/Zero (degrees) |

The CW parameter defines the direction of rotation of the magnet.

Counterclockwise is defined as rotation in 1-4-5-8 pin order (SOP-8 package) or 1-8-9-16 pin order (eTSSOP-16L package); clockwise is defined as the opposite direction, rotation in 8-5-4-1 pin order (SOP-8 package) or 16-9-8-1 pin order (eTSSOP-16L package); and

| Parameters | Value | Description      |
|------------|-------|------------------|
| CW         | 0     | Counterclockwise |
|            | 1     | Clockwise        |

## 4-Point Calibration Mode

The SC69431 allows the user to divide the output curve through 4 points into up to 5 segments using the 4-point calibration mode, allowing the number of calibration points to be reduced to 2 or 3. The Y coordinate (-50%~100%) and X coordinate ( $0^{\circ}$ ~ $360^{\circ}$ ) of the 4 calibration points, and the slope of the 5 segments (LNR\_S0,LNR\_S1,LNR\_S2,LNR\_S3,LNR\_S4) are fully set by the user. . To calculate the slope, two endpoints of the curve, 0 degree start and 360 degree end, are needed to calculate LNR\_S0 and LNR\_D\_S.

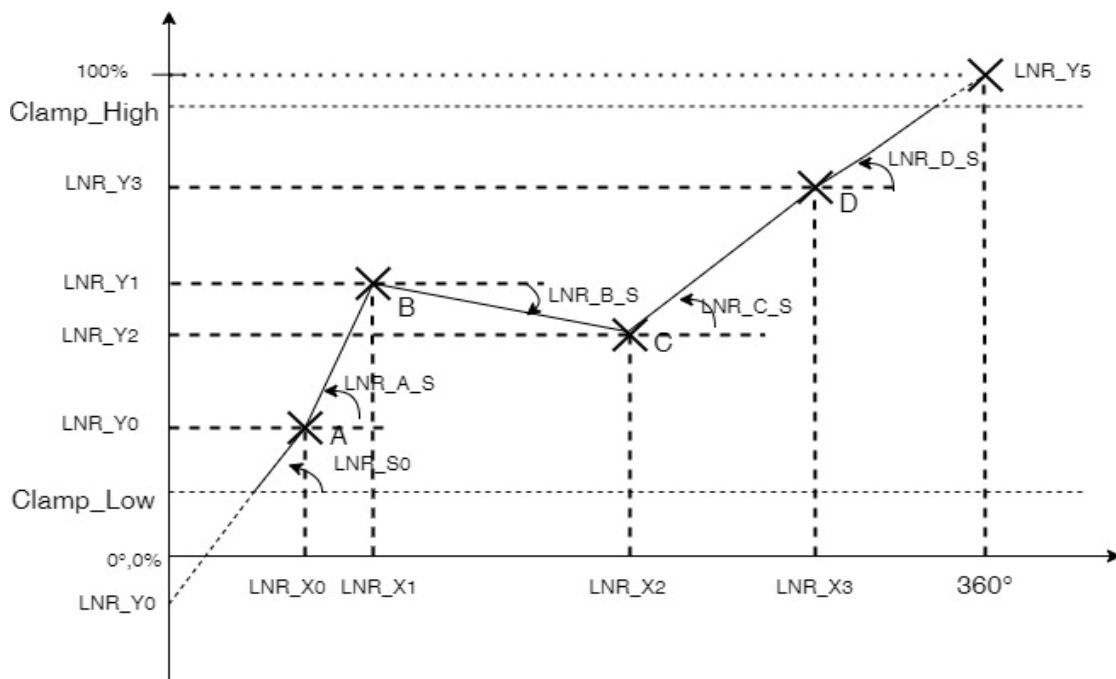


Fig.24 4-point calibration plot

## 8-Point Arbitrary Point Calibration Mode

The SC69431 allows the user to program the output curve desired by the user by customizing the X-coordinate ( $0^\circ \sim 360^\circ$ ) and Y-coordinate (0%~100%) of any 8 calibration points. However, the slope cannot be set and can only be calculated from two neighboring points. A default fixed calibration point  $[0^\circ, 0\%]$  is also required as a starting point.

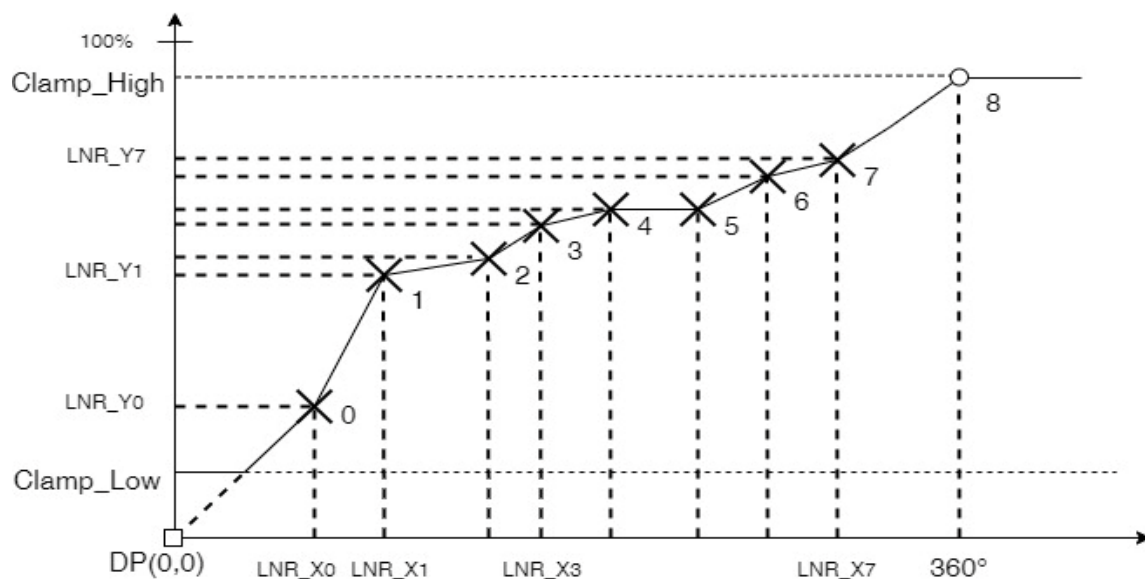


Fig.25 8-point calibration plot

## 16-Point Calibration Mode

The 16-point calibration mode allows the user to set only the Y-axis value of the coordinate point. x-axis coordinates are defined by the W value, which is divided into 16 segments within the WORK\_RANGE range. y-point coordinates are allowed to range from -50% to +150% of the clamped voltage, which allows the clamped voltage to be in-between a certain segment (as shown in the following figure). But the output is still clamped voltage.

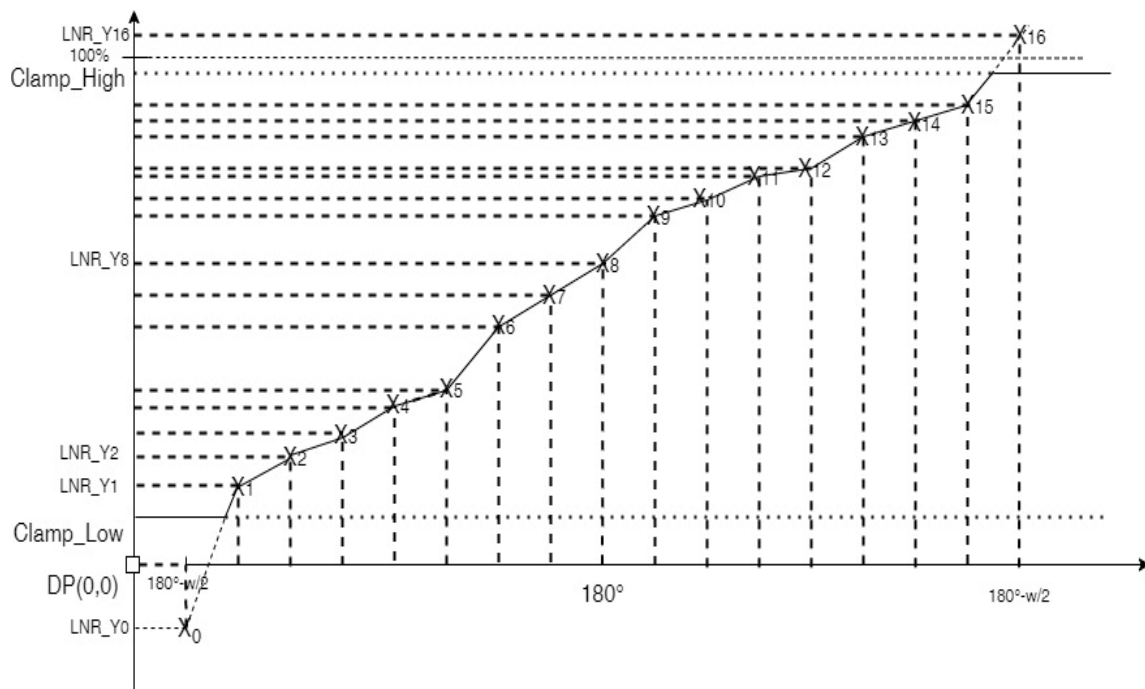


Fig.26 16-point calibration plot

### 32-point calibration mode

The work range  $W$  is defined by Workrange and is divided into 32 segments centered at  $180^\circ$ . The Y-axis coordinates consist of only 8 bits of data, so they are not absolute values but incremental coordinates. The two endpoints are  $(180^\circ - w/2, 0\%)$  and  $(180^\circ + w/2, 100\%)$  to define an ideal curve, and  $\Delta Y$  is the fine-tuned value of  $Y$  corresponding to the  $X$  coordinate of the horizontal axis.

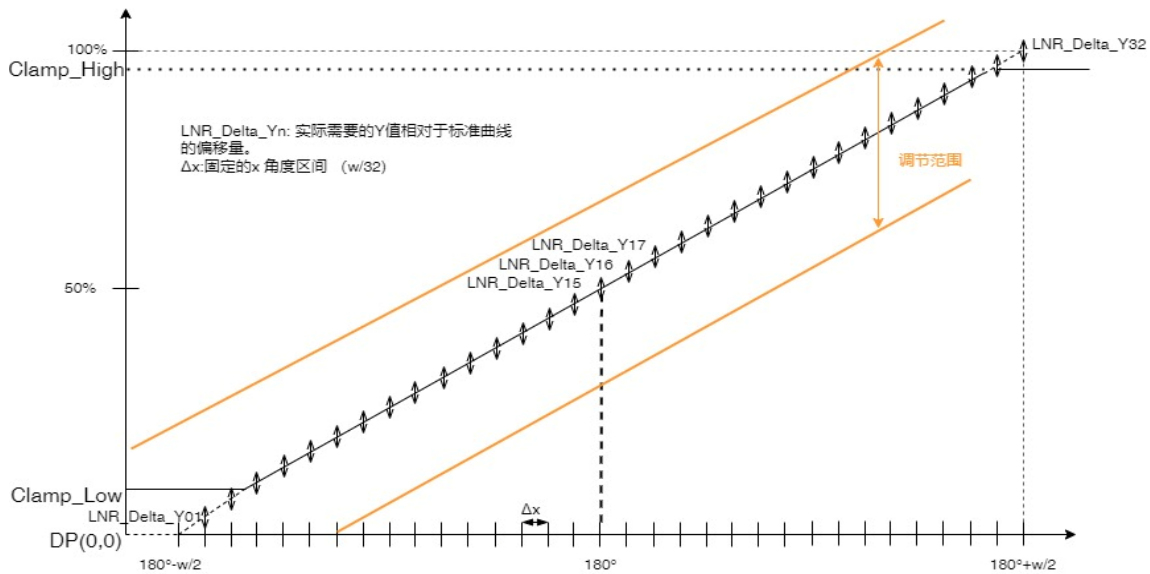


Fig.27 32-point calibration plot

### 32-point calibration, Y-axis coordinate deviation range setting

| Parameters               | Value | Description             |
|--------------------------|-------|-------------------------|
| LNR_DELTA_Y_EXPAND 【1:0】 | 0     | Tolerance range ±3.125% |
|                          | 1     | Tolerance range ±6.25%  |
|                          | 2     | Tolerance range ±12.5%  |
|                          | 3     | Tolerance range ±25%    |

### Angle Range Selection

$$W = \frac{WORK\_RANGE\_GAIN \times 360^\circ}{0xFFFF}$$

$$\text{Angular range } \theta_{min} = \frac{360^\circ - w}{2}, \theta_{max} = \frac{360^\circ + w}{2}$$

$\theta_{min}$  indicates the angle at 0% output, and  $\theta_{max}$  indicates the angle at 100% output. In order to correct the output properly, the angle range needs to be set to an integer multiple greater than 16.



Example of angular range setting:

| <b>WORK_RANGE_GAIN</b> | <b>w (°)</b> | <b><math>\theta_{min}</math> (°)</b> | <b><math>\theta_{max}</math> (°)</b> | <b><math>\Delta X</math>, 16pts(°)</b> | <b><math>\Delta X</math>, 32pts(°)</b> |
|------------------------|--------------|--------------------------------------|--------------------------------------|----------------------------------------|----------------------------------------|
| 0x1000                 | 22.50034     | 168.7498                             | 191.2502                             | 1.406271                               | 0.703136                               |
| 0x1100                 | 23.90661     | 168.0467                             | 191.9533                             | 1.494163                               | 0.747082                               |
| 0x1200                 | 25.31289     | 167.3436                             | 192.6564                             | 1.582055                               | 0.791028                               |
| 0x1300                 | 26.71916     | 166.6404                             | 193.3596                             | 1.669947                               | 0.834974                               |
| 0x2000                 | 45.00069     | 157.4997                             | 202.5003                             | 2.812543                               | 1.406271                               |
| 0x2100                 | 46.40696     | 156.7965                             | 203.2035                             | 2.900435                               | 1.450217                               |
| 0x2200                 | 47.81323     | 156.0934                             | 203.9066                             | 2.988327                               | 1.494163                               |
| 0x2300                 | 49.2195      | 155.3902                             | 204.6098                             | 3.076219                               | 1.538109                               |
| 0x3000                 | 67.50103     | 146.2495                             | 213.7505                             | 4.218814                               | 2.109407                               |
| 0x3100                 | 68.9073      | 145.5463                             | 214.4537                             | 4.306706                               | 2.153353                               |
| 0x3200                 | 70.31357     | 144.8432                             | 215.1568                             | 4.394598                               | 2.197299                               |
| 0x3300                 | 71.71984     | 144.1401                             | 215.8599                             | 4.48249                                | 2.241245                               |
| 0x4000                 | 90.00137     | 134.9993                             | 225.0007                             | 5.625086                               | 2.812543                               |
| 0x4100                 | 91.40764     | 134.2962                             | 225.7038                             | 5.712978                               | 2.856489                               |
| 0x4200                 | 92.81392     | 133.593                              | 226.407                              | 5.80087                                | 2.900435                               |
| 0x4300                 | 94.22019     | 132.8899                             | 227.1101                             | 5.888762                               | 2.944381                               |
| 0xFA00                 | 351.5679     | 4.216068                             | 355.7839                             | 21.97299                               | 10.9865                                |
| 0xFB00                 | 352.9741     | 3.512932                             | 356.4871                             | 22.06088                               | 11.03044                               |
| 0xFC00                 | 354.3804     | 2.809796                             | 357.1902                             | 22.14878                               | 11.07439                               |
| 0xFD00                 | 355.7867     | 2.106661                             | 357.8933                             | 22.23667                               | 11.11833                               |
| 0xFE00                 | 357.193      | 1.403525                             | 358.5965                             | 22.32456                               | 11.16228                               |
| 0xFF00                 | 358.5992     | 0.700389                             | 359.2996                             | 22.41245                               | 11.20623                               |
| 0xFFFF                 | 360          | 0                                    | 360                                  | 22.5                                   | 11.25                                  |

## 12. Typical Application Circuit

### Analog/PWM/SENT SOP-8 Package Application Circuits

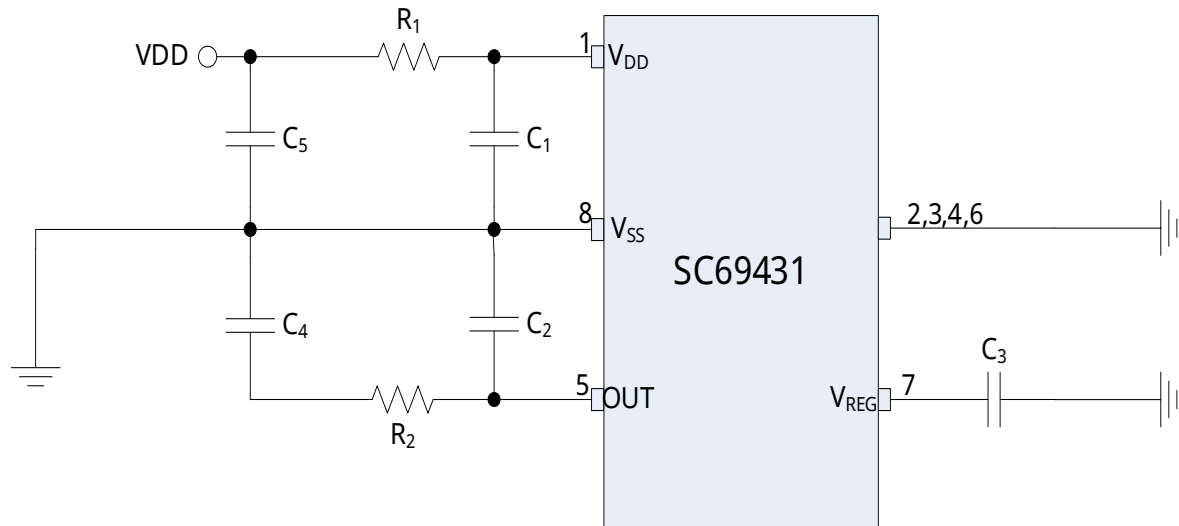


Fig.28 Analog/PWM/SENT SOP-8 Reference Circuit Diagram

### Analog Output Reference

| Component | Min.  | Typ.  | Max.  | Description                                                      |
|-----------|-------|-------|-------|------------------------------------------------------------------|
| R1        | -     | 0Ω    | 10Ω   | Reducing the impact of EMC increases the output error            |
| R2        | -     | 0Ω    | 51Ω   | Reduce the impact of EMC                                         |
| C1        | 100nF | 100nF | -     | Placement near pins                                              |
| C2        | 47nF  | 100nF | -     | Placement near pins                                              |
| C3        | 47nF  | 100nF | 220nF | Placement near pins                                              |
| C4        | -     | 1nF   | 10nF  | Reduce the impact of EMC and place it close to the connector end |
| C5        | -     | 1nF   | 10nF  | Reduce the impact of EMC and place it close to the connector end |

### Digital Output (PWM) Reference

| Component | Min.  | Typ.  | Max.  | Description                                                          |
|-----------|-------|-------|-------|----------------------------------------------------------------------|
| R1        | -     | 0Ω    | 33Ω   | Reducing the impact of EMC affects the output of high level          |
| R2        | -     | 0Ω    | 51Ω   | Reducing the impact of EMC affects the output of high and low levels |
| C1        | 100nF | 100nF | -     | Placement near pins                                                  |
| C2        | 2.2nF | 4.7nF | 22nF  | Placement near pins                                                  |
| C3        | 47nF  | 100nF | 220nF | Placement near pins                                                  |
| C4        | -     | 1nF   | 10nF  | Reduce the impact of EMC and place it close to the connector end     |
| C5        | -     | 1nF   | 2.2nF | Reduce the impact of EMC and place it close to the connector end     |

## Digital Output (SENT) Reference Value

| Component | Min.  | Typ.  | Max.  | Description                                                      |
|-----------|-------|-------|-------|------------------------------------------------------------------|
| R1        | -     | 0Ω    | 10Ω   | Reducing the impact of EMC affects the output of high level      |
| R2        | -     | -     | -     |                                                                  |
| C1        | 100nF | 100nF | -     | Placement near pins                                              |
| C2        | 1nF   | 4.7nF | 22nF  | Placement near pins                                              |
| C3        | 47nF  | 100nF | 220nF | Placement near pins                                              |
| C4        | -     | 1nF   | 10nF  | Reduce the impact of EMC and place it close to the connector end |
| C5        | -     | -     | 1nF   | Reduce the impact of EMC and place it close to the connector end |

## Analog/PWM/SENT TSSOP-16 Package Application Circuit

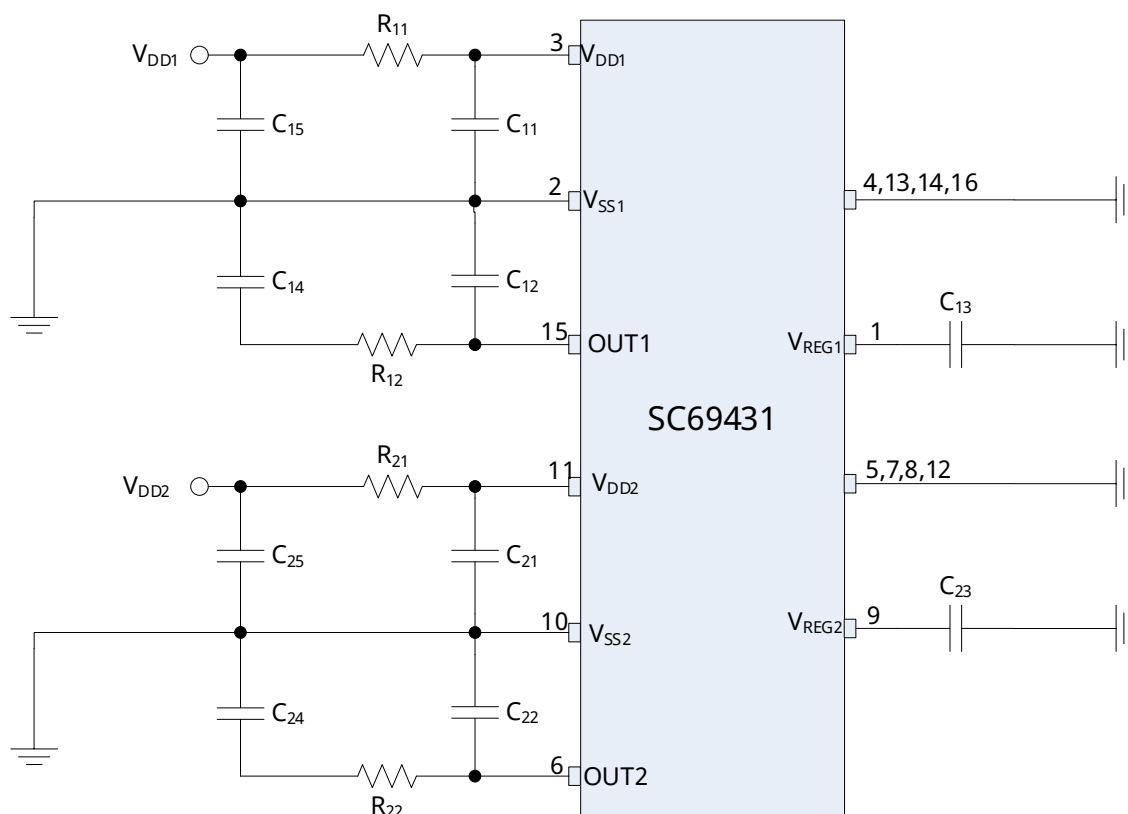


Fig.29 Analog/PWM/SENT TSSOP-16 Reference Circuit Diagram

## Analog Output Reference Value

| Component | Min.  | Typ.  | Max.  | Description                                           |
|-----------|-------|-------|-------|-------------------------------------------------------|
| R11, R21  | -     | 0Ω    | 10Ω   | Reduces EMC effects and increases measurement errors  |
| R12, R22  | -     | 0Ω    | 51Ω   | Reduces EMC effects and increases measurement errors  |
| C11, C21  | 100nF | 100nF | -     | Placement near pins                                   |
| C12, C22  | 47nF  | 100nF | -     | Placement near pins                                   |
| C13, C23  | 47nF  | 100nF | 220nF | Placement near pins                                   |
| C14, C24  | -     | 1nF   | 10nF  | Reduced EMC impact, placed close to the connector end |
| C15, C25  | -     | 1nF   | 10nF  | Reduced EMC impact, placed close to the connector end |

## Digital Output (PWM) Reference Value

| Component | Min.  | Typ.  | Max.  | Description                                               |
|-----------|-------|-------|-------|-----------------------------------------------------------|
| R11, R21  | -     | 0Ω    | 33Ω   | Reduces EMC effects affecting the output high level       |
| R12, R22  | -     | 0Ω    | 51Ω   | Reduces EMC effects, affecting output high and low levels |
| C11, C21  | 100nF | 100nF | -     | Placement near pins                                       |
| C12, C22  | 2.2nF | 4.7nF | 22nF  | Placement near pins                                       |
| C13, C23  | 47nF  | 100nF | 220nF | Placement near pins                                       |
| C14, C24  | -     | 1nF   | 10nF  | Reduced EMC impact, placed close to the connector end     |
| C15, C25  | -     | 1nF   | 2.2nF | Reduced EMC impact, placed close to the connector end     |

## Digital Output (SENT) Reference Value

| Component | Min.  | Typ.  | Max.  | Description                                           |
|-----------|-------|-------|-------|-------------------------------------------------------|
| R11, R21  | -     | 0Ω    | 33Ω   | Reduces EMC effects affecting the output high level   |
| R12, R22  | -     | -     | -     |                                                       |
| C11, C21  | 100nF | 100nF | -     | Placement near pins                                   |
| C12, C22  | 1nF   | 4.7nF | 22nF  | Placement near pins                                   |
| C13, C23  | 47nF  | 100nF | 220nF | Placement near pins                                   |
| C14, C24  | -     | 1nF   | 10nF  | Reduced EMC impact, placed close to the connector end |
| C15, C25  | -     | -     | 1nF   | Reduced EMC impact, placed close to the connector end |

### PSI5 SOP-8 Package Application Circuit

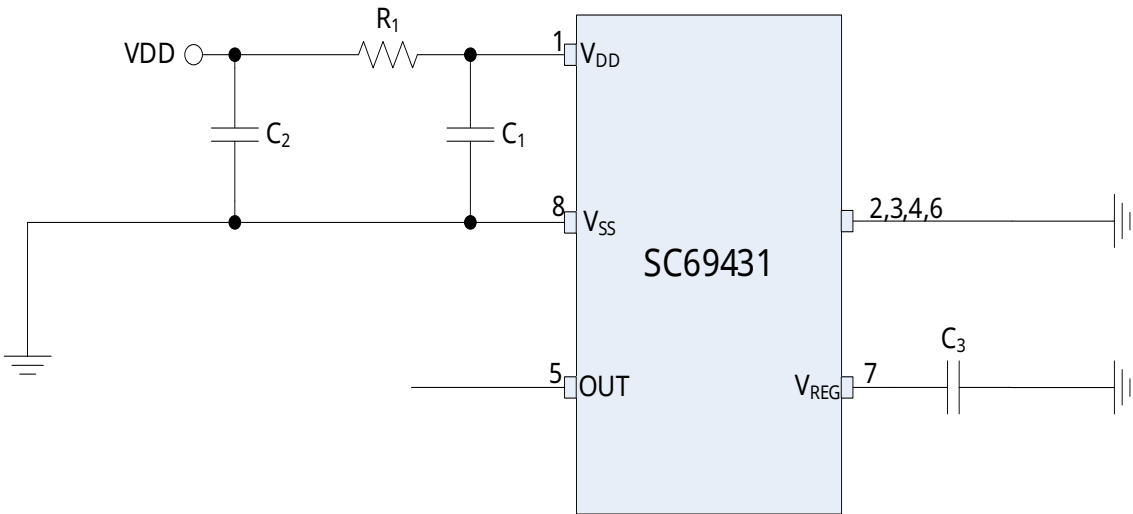


Fig.30 PSI5 SOP-8 Reference Circuit Diagram

| Component | Min.  | Typ.  | Max.  | Description                                           |
|-----------|-------|-------|-------|-------------------------------------------------------|
| R1        | -     | 0Ω    | 10Ω   |                                                       |
| C1        | 9nF   | 10nF  | 24nF  | Placement near pins                                   |
| C2        | 500pF | -     | 1nF   | Reduced EMC impact, placed close to the connector end |
| C3        | 47nF  | 100nF | 220nF | Placement near pins                                   |

### PSI5 TSSOP-16 Package Application Circuit

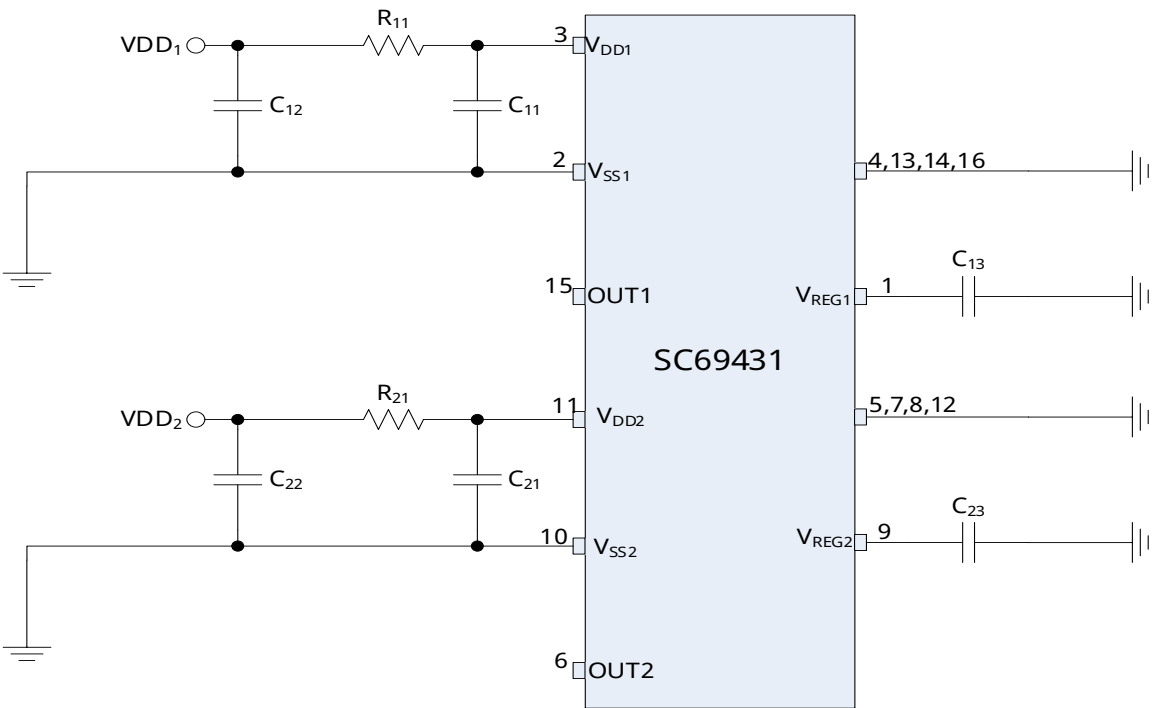


Fig.31 PSI5 TSSOP-16L Reference Circuit Diagram

| Component | Min.  | Typ.  | Max.  | Description                                           |
|-----------|-------|-------|-------|-------------------------------------------------------|
| R11, R21  | -     | 0Ω    | 10Ω   |                                                       |
| C11, C21  | 9nF   | 10nF  | 24nF  | Placement near pins                                   |
| C12, C22  | 500pF | -     | 1nF   | Reduced EMC impact, placed close to the connector end |
| C13, C23  | 47nF  | 100nF | 220nF | Placement near pins                                   |

### SPI SOP-8 Package Application Circuit

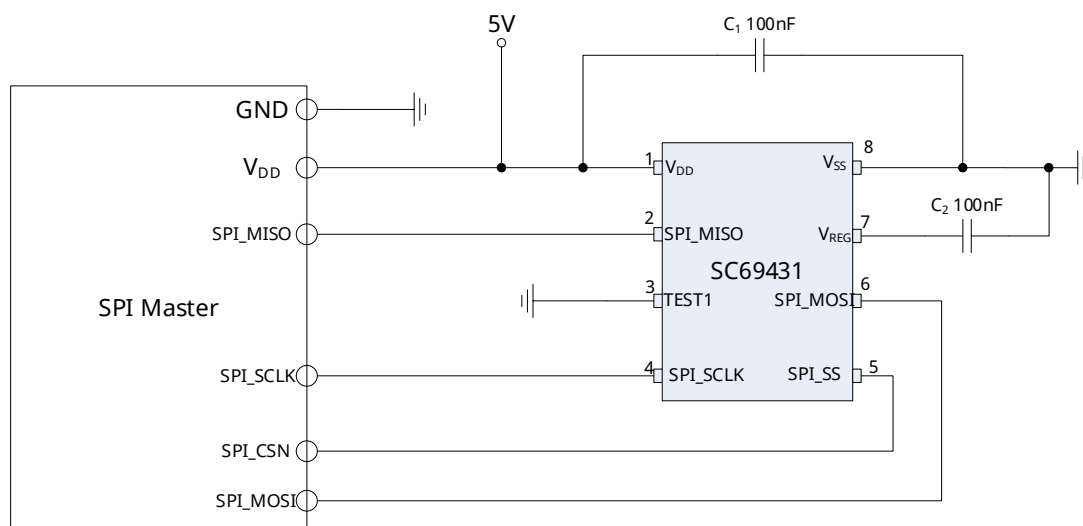


Fig.32 SPI SOP-8 Reference Circuit Diagram

### SPI TSSOP-16 Package Application Circuit

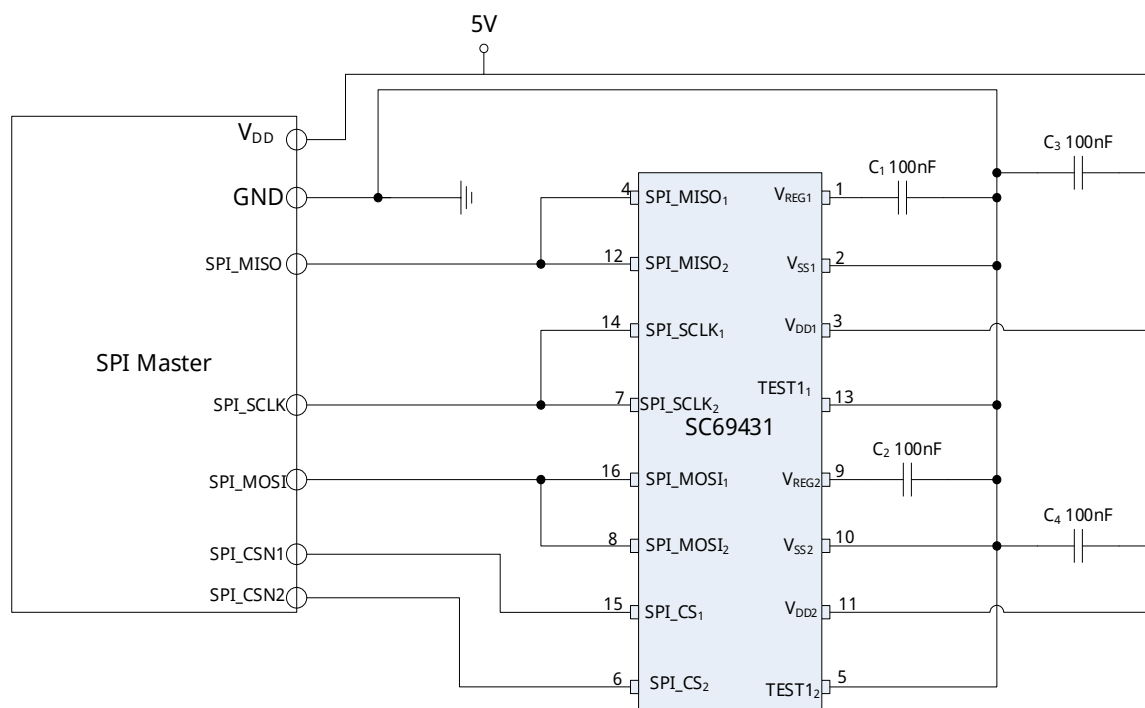


Fig.33 SPI TSSOP-16 Reference Circuit Diagram

SIP-3 Single Package Application Circuit

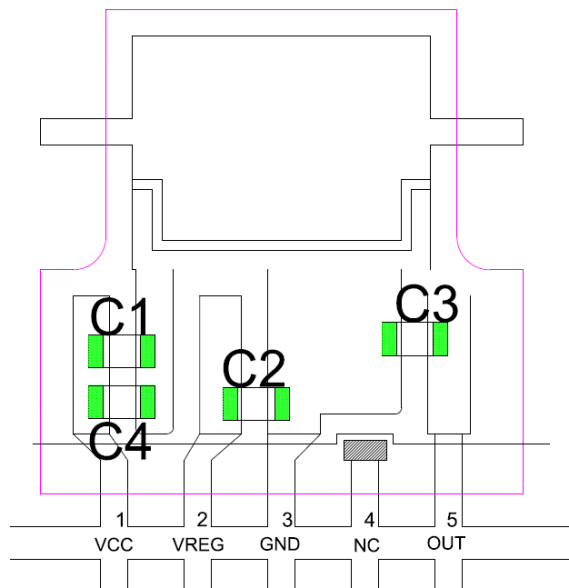


Fig.34 SIP3 Single Chip Reference Circuit Diagram

| Component     | Min. | Typ.  | Max. | Description |
|---------------|------|-------|------|-------------|
| Analog Output |      |       |      |             |
| C1            |      | 100nF | -    |             |
| C2            | -    | 100nF | -    |             |
| C3            | -    | 100nF | -    |             |
| C4            |      | 2.2nF |      |             |
| PWM Output    |      |       |      |             |
| C1            | -    | 100nF | -    |             |
| C2            | -    | 100nF | -    |             |
| C3            | -    | 2.2nF | -    |             |
| C4            |      | 2.2nF |      |             |
| SENT Output   |      |       |      |             |
| C1            | -    | 100nF | -    |             |
| C2            | -    | 100nF | -    |             |
| C3            | -    | 2.2nF | -    |             |
| C4            |      | 2.2nF |      |             |
| PSI5 Output   |      |       |      |             |
| C1            | -    | 10nF  | -    |             |
| C2            | -    | 100nF | -    |             |
| C3            |      | 100nF |      |             |
| C4            |      | 0nF   |      |             |

## 13. Packaging Information

### SOP-8 Package Type

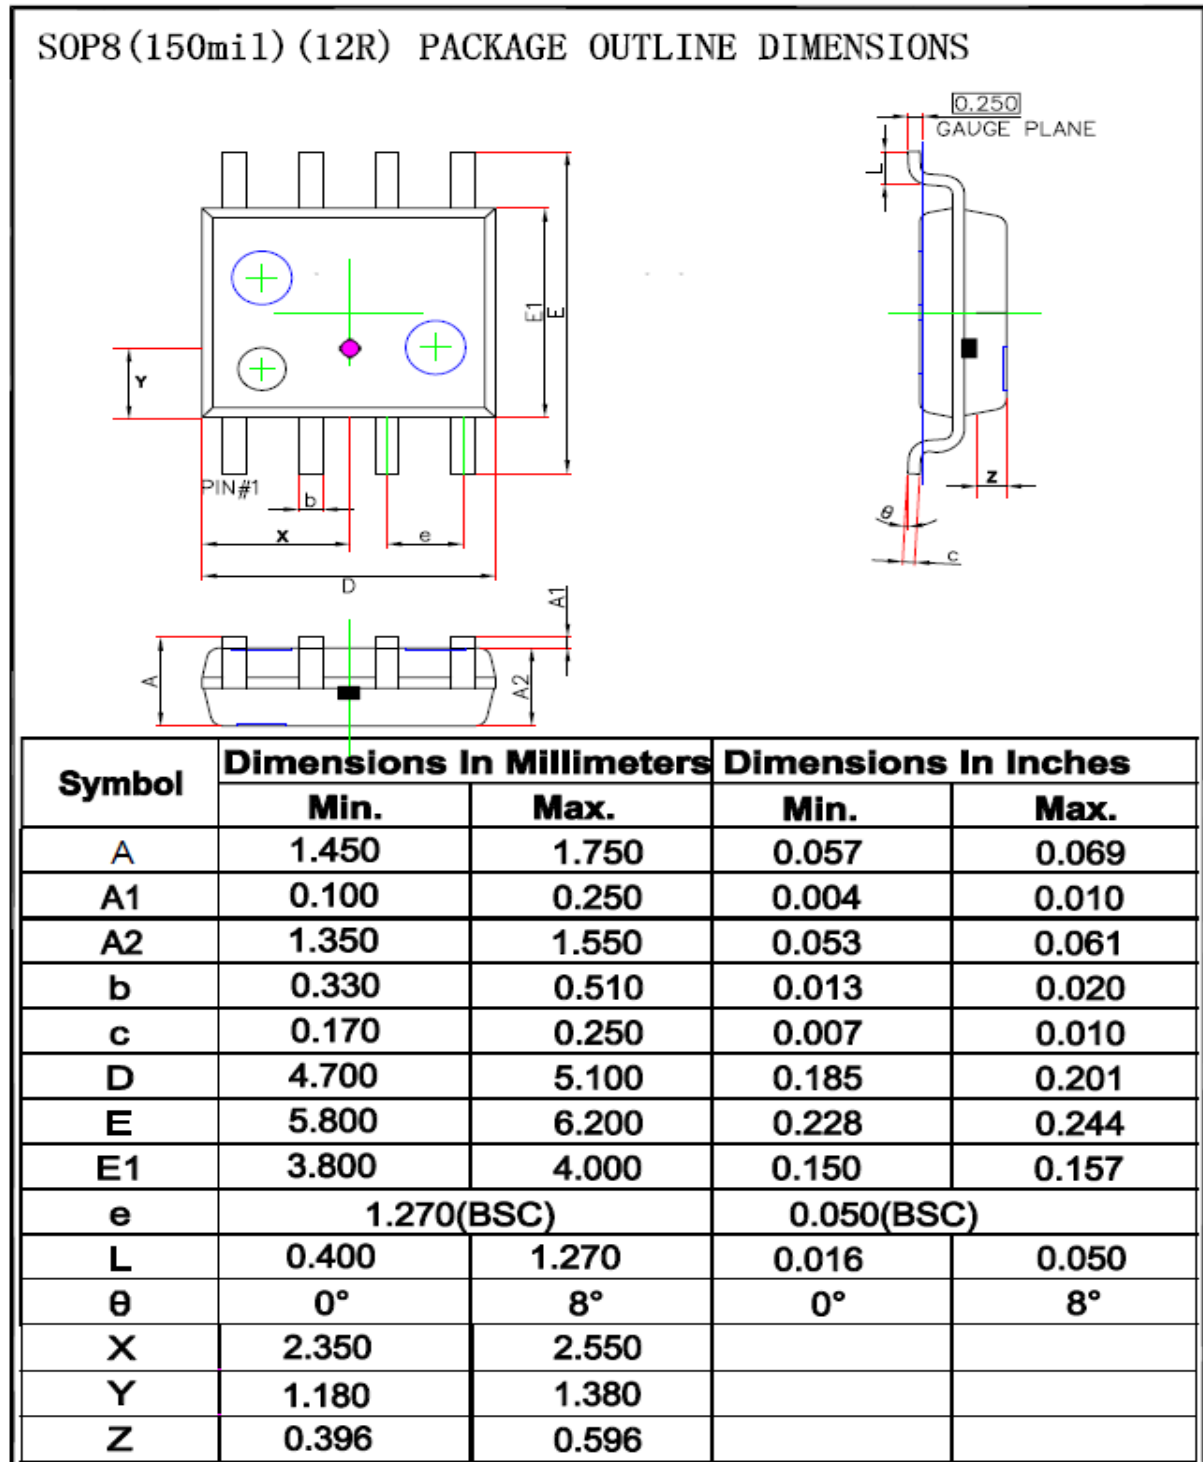


Fig.35 SOP-8 package dimensions



## TSSOP-16 Package Type


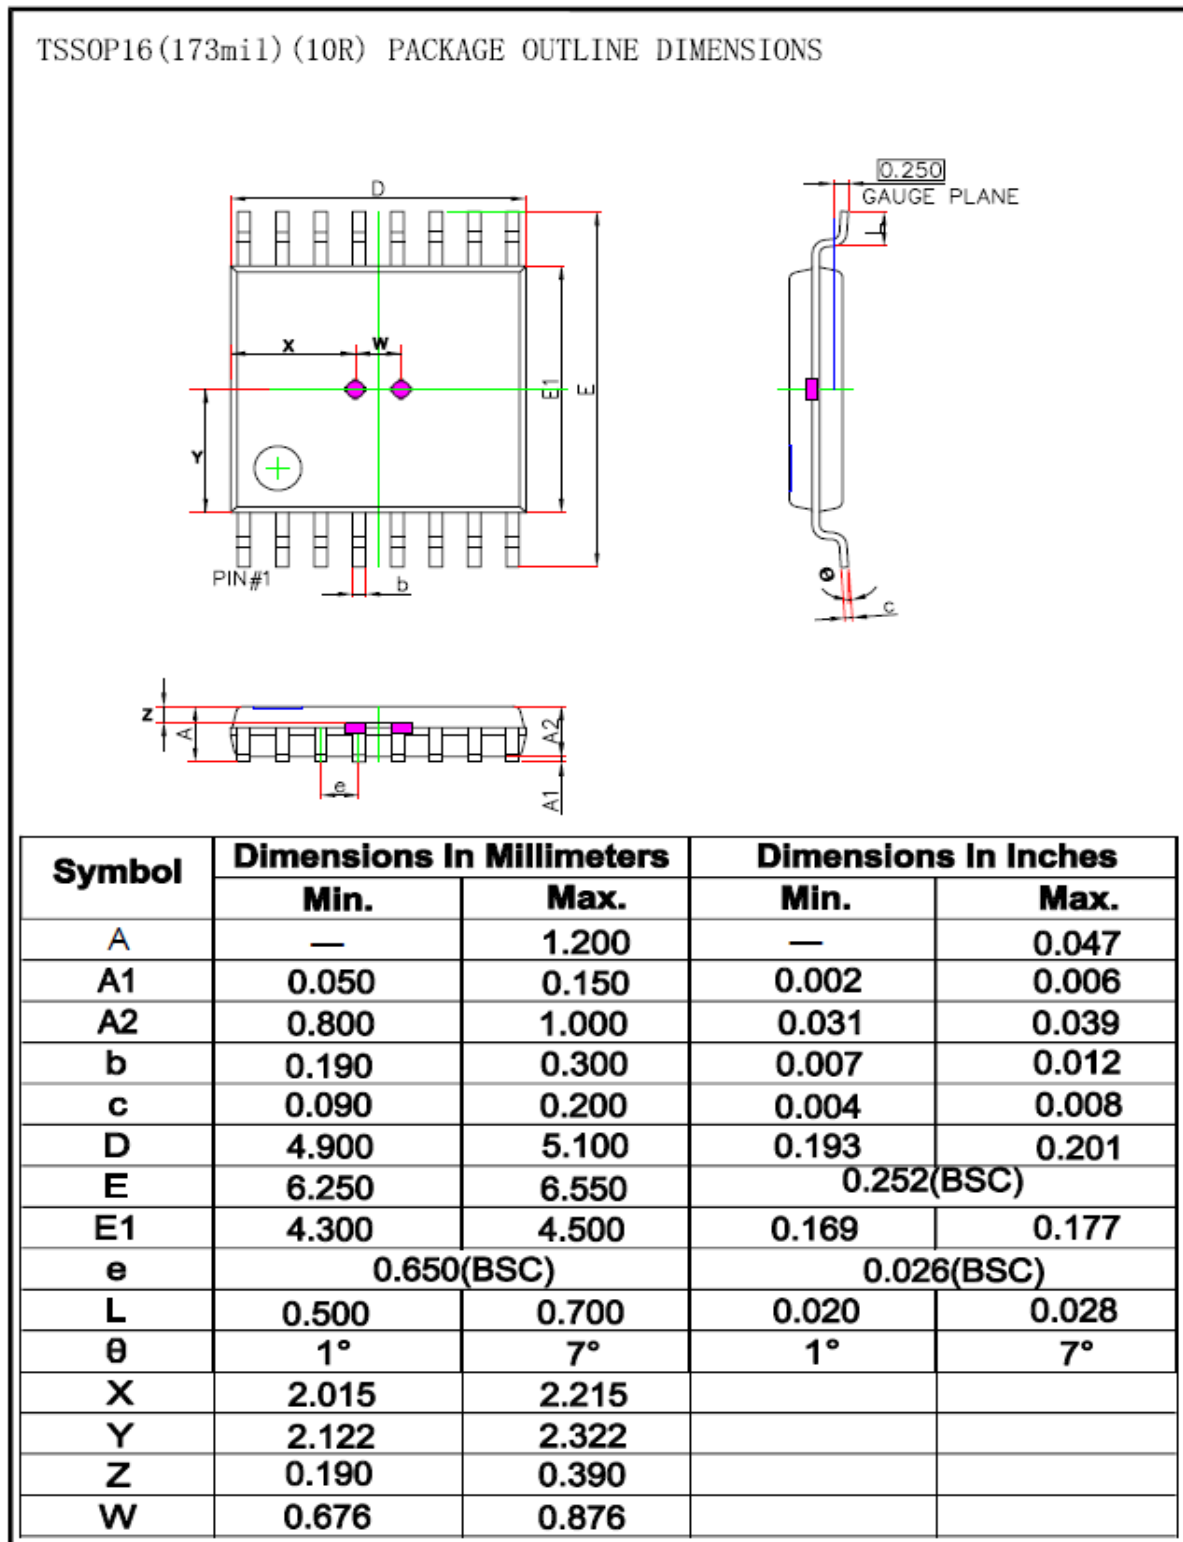


Fig.36 TSSOP-16 package dimensions

SIP-3 Package Type

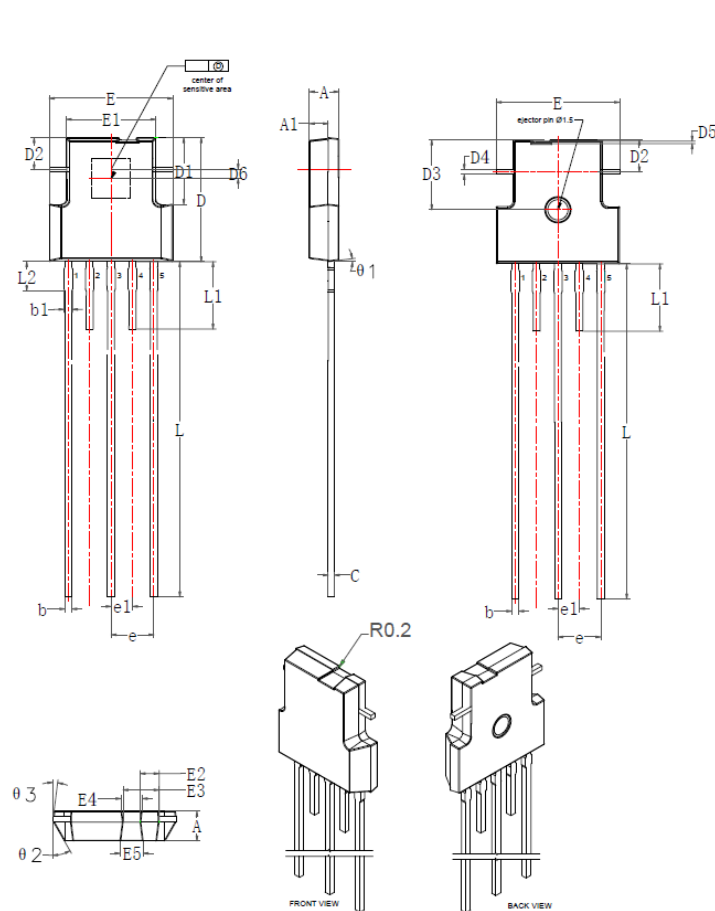

| Symbol        | DIMENSIONS  |      |      |
|---------------|-------------|------|------|
|               | Millimeters |      |      |
|               | Min         | TYP  | Max  |
| E             | 7.23        | 7.33 | 7.43 |
| E1            | 5.23        | 5.33 | 5.43 |
| E2            | 0.90        | 1.00 | 1.10 |
| E3            | 2.05        | 2.15 | 2.25 |
| E4            | 1.20        | 1.30 | 1.40 |
| E5            | 1.15        | 1.25 | 1.35 |
| b             | 0.33        | 0.43 | 0.53 |
| b1            | 0.4         | 0.5  | 0.6  |
| c             | —           | 0.36 | —    |
| D             | 7.25        | 7.35 | 7.45 |
| D1            | 3.85        | 3.95 | 4.05 |
| D2            | 1.8         | 1.9  | 2.0  |
| D3            | 4.05        | 4.15 | 4.25 |
| D4            | 0.2         | 0.3  | 0.4  |
| D5            | 0.14        | 0.15 | 0.16 |
| D6            | —           | 0.40 | —    |
| $\varnothing$ | —           | 0.3  | —    |
| A             | 1.65        | 1.75 | 1.85 |
| A1            | 1.0         | 1.1  | 1.2  |
| e             | 2.54 TYP.   |      |      |
| e1            | 1.27 TYP.   |      |      |
| L             | 18.9        | 19.9 | 20.9 |
| L1            | 3.90        | 4.00 | 4.10 |
| L2            | 0.9         | 1.0  | 1.1  |
| $\theta 1$    | 7° TYP.     |      |      |
| $\theta 2$    | 30° TYP.    |      |      |
| $\theta 3$    | 7° TYP.     |      |      |

Fig.37 SIP-3 package dimensions

14. Revision History

| Revision | Date       | Description                  |
|----------|------------|------------------------------|
| Draft    | 2024-10-28 | Initial draft                |
| Rev.V0.1 | 2025-7-15  | Draft update                 |
| Rev.V0.2 | 2025-8-20  | Format and parameter updates |